




■六角型

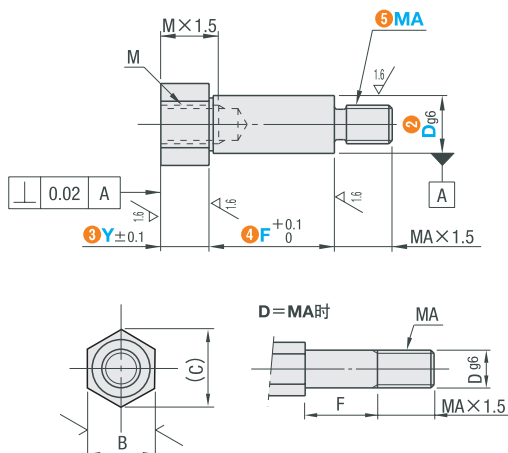


代码	材质	表面处理
BDLHC	S45C	发黑
BDPLHC		无电解镀镍
BDSLHC	SUS304	—

$$\frac{6.3}{\nabla} \left(\frac{1.6}{\nabla} \right)$$


型号 ① 代码	② Dg6		最小单位 1mm ③ Y ④ F		⑤ MA (粗牙螺纹) 选择	M (粗牙螺纹)	B	(C)
BDLHC BDPLHC BDSLHC	6	— 0.004 — 0.012	2~60	5~100	4 5 6	M3	8	9.2
	8	— 0.005 — 0.014			5 6 8	M4	10	11.5
	10				6 8 10	M6	13	15.0
	12	— 0.006 — 0.017		10~100	6 8 10 12	M8	14	16.2
	15				8 10 12	M10	17	19.6

①外螺纹退刀槽加工尺寸



粗牙螺纹			
螺纹直径 (M · MA)	g	r	f
3	1.2~1.5	0.2~0.3	2.1 ~ 2.4
4			2.9 ~ 3.2
5			3.9 ~ 4.1
6	1.5~2.5	0.2~0.6	4.3 ~ 4.9
8			6.3 ~ 6.6
10			8.1 ~ 8.3
12	1.5~3.0	0.2~1.0	9.8~10.1