



轴承、轴承座组件

滚珠轴承组件 铸铁嵌入型·张紧型




型号
BADMC20






型号区分:
代码 5 天发货



BADMC (嵌入型)



BADTKP (张紧型)

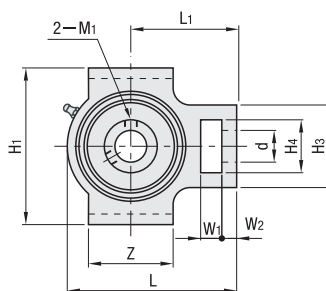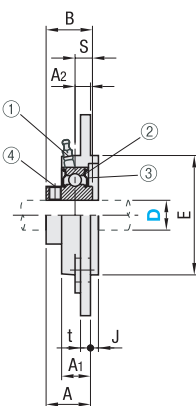

精度: JIS B 1558
JIS B 1514
JIS B 1559
轴承箱轴承座直径的精度: H7(间隙配合)
使用温度: -15~+100℃

构成零件	材质
①固定座	FC200
②轴承	SUJ2
③橡胶密封圈	丁腈橡胶(NBR)
④止动螺丝	SCM435

型号		JIS公称 规格 BADMC	F	P	P.C.D.	t	A	A ₁	A ₂	J	E	d	B	S	基本额定负载 (kN)		止动螺丝			重量 (g)	
代码	D														Cr (动)	Cor (静)	M ₁	紧固扭矩 (N · cm)	轴向 负载能力 (N)		
BADMC	12	UCFC201	100	55.1	78	7	28.3	20.5	10	5	62	12	31.0	12.7	12.8	6.6	M6×0.75	392	640	890	
	15	UCFC202																		870	
	17	UCFC203																		860	
	20	UCFC204																		840	
	25	UCFC205	115	63.6	90	7	29.8	21	10	6	70	12	34.1	14.3	14.0	7.9		M8×1	490	1280	840
	30	UCFC206	125	70.7	100	8	32.2	23												8	80
	35	UCFC207	135	77.8	110	9	36.4	26		11	90	14	42.9	17.5	25.9	15.4	1960				
	40	UCFC208	145	84.8	120												10			100	10
	45	UCFC209	160	93.3	132	14	40.2	26	10	12	110	51.6	33.0	20.5	M10×1.25	2350			2930		
	50	UCFC210	165	97.6	138												14		42.6	28	10

型号		JIS公称规格 BADTKP	H1	H2	H3	H4	L	L1	A	A1	A2	W1	W2	Z	d	B	S	基本额定负载(kN)		止动螺丝		重量(g)	
代码	D																	Cr(动)	Cor(静)	M1	紧固扭矩(N·cm)		轴向负载能力(N)
BADTKP	12	UCT201	89	76	51	32	94	61	32	21	12	16	10	51	19	31.0	12.7	12.8	6.6	M6×0.75	392	640	790
	15	UCT202																					770
	17	UCT203																					760
	20	UCT204																					740
	25	UCT205	102	89	56	37	97	62	32	24	13	64	22	57	64	34.1	14.3	14.0	7.9	M8×1	1180	2590	820
	30	UCT206																					1400
	35	UCT207																					1960
	40	UCT208																					1300
	45	UCT209	114	102	83	49	129	78	37	30	16	19	16	83	29	49.2	19	29.3	17.9	M8×1	1180	2930	2400
	50	UCT210																					149

询价④种方式



官网 <http://www.srdfaa.com>
深圳市仕瑞达自动化设备有限公司



全国免费 400-966-3863
客服热线 0755-27926613