



定位销/夹具衬套

定位销用衬套

两面切割法兰型



P尺寸固定·L尺寸选择型

型号 (1 代码 · 3 P) — 4 L

DAN10 — 16

■请按步骤①~④选择
型号和参数后进行订购。



型号区分:

代码 7 天发货

P尺寸·L尺寸自由指定型



型号 (1 代码 · 2 D) — 3 P — 4 L

DANF10 — P4.11 — L6.0

■两面切割法兰型



型号		材质	表面处理	硬度
P尺寸固定·L尺寸选择型	P尺寸·L尺寸自由指定型			
DAN	DANF	SKS3	—	淬火硬度56~60HRC
—	DANFB	SKS3	发黑	淬火硬度56~60HRC
DANM	DANFM	SKS3	无电解镀镍	淬火硬度56~60HRC
—	DANFC	SUS440C	—	淬火硬度50~55HRC
—	DANFS	SUS304	—	—

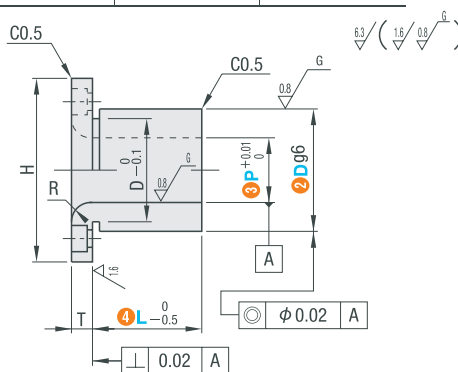

Dg6	D公差 g6
10	-0.005 -0.014
12	-0.006 -0.017
15	-0.007 -0.020
18	-0.007 -0.020
22	-0.007 -0.020
25	-0.007 -0.020
26	-0.007 -0.020
30	-0.009 -0.025
35	-0.009 -0.025

■P尺寸固定·L尺寸选择型

型号		③L选择	H	Dg6	T	R	A	W	d	d1	h
①代码	③P										
DAN DANM	5	8 10 12 16	25	10	5	1	17	12	3.3	6.5	3.5
	6	8 10 12 16	25	10	5	1	17	12	3.3	6.5	3.5
	8	10 12 16 20	28	12	5	2	20	15	3.3	6.5	3.5
	10	10 12 16 20	36	15	6	2	26	22	4.5	8	4.5
	12	12 16 20 25 30	36	18	6	2	26	22	4.5	8	4.5
	13	12 16 20 25 30	40	22	6	2	30	25	4.5	8	4.5
	15	12 16 20 25 30	44	25	6	2	34	30	4.5	8	4.5
	16	16 20 25 30 35	44	26	6	2	34	30	4.5	8	4.5
	20	16 20 25 30 35	56	30	8	3	42	35	6.6	11	6.5
	25	20 25 30 35 40	60	35	8	3	46	40	6.6	11	6.5

■P尺寸·L尺寸自由指定型

型号		③P	④L	R	H	W	T	A	d	d1	h
①代码	②Dg6	最小单位0.01mm	最小单位0.1mm								
DANF DANFB DANFM DANFC DANFS	10	4.00~ 6.50	5.0~15.0	1	25	12	5	17	3.3	6.5	3.5
	12	6.00~ 8.50	5.0~15.0	2	28	15	5	20	3.3	6.5	3.5
	15	8.00~10.50	5.0~15.0	2	36	22	6	26	4.5	8	4.5
	18	10.00~12.50	5.0~15.0	2	36	22	6	26	4.5	8	4.5
	20	12.00~13.50	5.0~15.0	2	40	25	6	30	4.5	8	4.5
	22	12.00~13.50	5.0~15.0	2	40	25	6	30	4.5	8	4.5
	25	13.00~15.50	5.0~15.0	2	44	30	6	34	4.5	8	4.5
	26	15.00~16.50	5.0~15.0	2	44	30	6	34	4.5	8	4.5
	30	16.00~20.50	12.0~50.0	3	56	35	8	42	6.6	11	6.5
	35	20.00~25.00	12.0~50.0	3	60	40	8	46	6.6	11	6.5

①L+T≤P×3.0

询价④种方式



官网 <http://www.srdfaa.com>
深圳市仕瑞达自动化设备有限公司



全国免费 400-966-3863
客服热线 0755-27926613