




轴承、轴承座组件

带座轴承 双轴承T型高度指定型



代码 宽度T选择·高度h选择型	材质		表面处理
	轴承	固定座	固定座
BBHWFB	钢	S45C	发黑
BBHWF		铝合金	无电解镀锌
BBHWFA			本色阳极氧化处理

6.3/(1.6/)

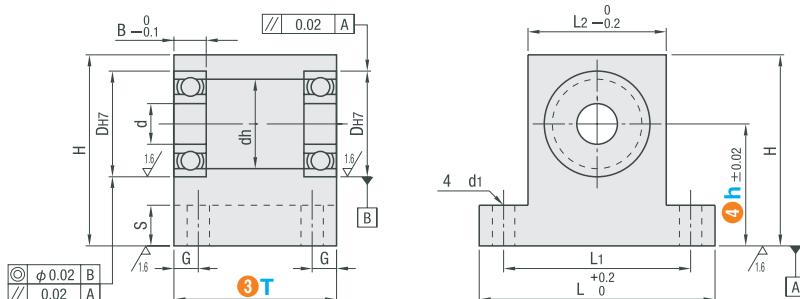

型号(①代码·②轴承型号) — ③T — ④h
BBHWFB6202ZZ — 25 — 28

■请按步骤①~④选择型号和参数后进行订购。



型号区分: 7天发货

型号		宽度	高度	d	H	L1	d1	L	L2	S	dh	Dh7	B
①代码	②轴承型号	③T	④h										
BBHWFB BBHWF BBHWFA	606ZZ	25 35	15~30	6	h+13	35	5.5	47	23	10	13	17	6
	626ZZ	25 35	15~30	6	h+14	37		49	25		15	19	
	608ZZ	25 35	15~30	8	h+15	41		53	29		18	22	
	628ZZ	25 35	15~30	8	h+16	44		56	32		20	24	
	6900ZZ	25 40	15~40	10	h+15	41		53	29		19	22	6
	6000ZZ	25 40	20~40	10	h+17	46		58	34		22	26	8
	6200ZZ	30 40	20~40	10	h+19	50		62	38		24	30	9
	6901ZZ	25 40	20~40	12	h+16	44		56	32		21	24	6
	6001ZZ	25 40	20~40	12	h+18	48		60	36		24	28	8
	6201ZZ	30 40	20~40	12	h+20	52		64	40		26	32	10
	6902ZZ	25 50	20~50	15	h+18	48	5.5	60	36	15	25	28	7
	6002ZZ	30 50	25~50	15	h+20	54	6.5	68	40	15	28	32	9
	6202ZZ	35 50	25~50	15	h+22	58		72	44		29	35	11
	6903ZZ	25 50	25~50	17	h+19	52		64	38		27	30	7
	6003ZZ	30 50	25~50	17	h+22	56		70	43		31	35	10
	6203ZZ	35 50	25~50	17	h+24	62		76	49		34	40	12
	6904ZZ	35 50	30~60	20	h+23	59	9	73	45	15	34	37	9
	6004ZZ	40 50	30~60	20	h+25	66		82	50		36	42	12
	6204ZZ	45 50	30~60	20	h+28	72		88	56		40	47	14
	*6005ZZ	40 60	40~80	25	h+28	76		96	56		41	47	12
	*6205ZZ	45 60	40~80	25	h+31	82	11	102	62	20	45	52	15
	*6006ZZ	40 60	40~80	30	h+32	84		104	64		48	55	13
	*6206ZZ	50 60	40~80	30	h+36	92		112	72		55	62	16
	*6007ZZ	50 60	40~90	35	h+36	92		112	72		55	62	14
	*6207ZZ	60 70	40~90	35	h+44	118	13	148	88	25	64	72	17
	*6008ZZ	50 70	50~100	40	h+41	102	11	122	82	20	60	68	15
	*6208ZZ	60 80	50~100	40	h+50	130	13	160	100	25	74	80	18



型号(①代码·②轴承型号) — ③T — ④h — (KKC·KCC·NA)
BBHWFB6000ZZ — 25 — 28 — NA

可选加工	加工倒角C	加工倒角C2	无轴承型
代码	KKC	KCC	NA
技术说明	加工上端两侧倒角C(45°)加工。 指定方法 KKC		固定座中不组 装轴承, 作为 附件发货。
	d	KKC	
	3~8	5	
	10~20	10	
	25~30	12	

询价④种方式



官网 <http://www.srdfaa.com>
深圳市仕瑞达自动化设备有限公司



全国免费 400-966-3863
客服热线 0755-27926613