

交叉滚子滑台

沉孔型/螺纹孔型

手动位移台







型号
IATD1025



型号区分:
交货期 5 天发货





滑轨安装孔	代码	滑台		耐热温度
		材质	表面处理	
沉孔型	IATD	S45C	发黑	-20~110℃
螺纹孔型	IAT	S45C	发黑	-20~110℃

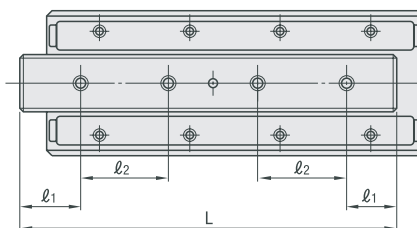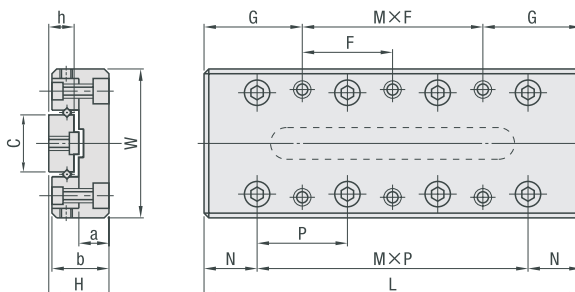

型号		主要尺寸			滑台安装孔尺寸							滑台表面尺寸			侧面尺寸			滑轨安装孔尺寸													
代码	No.	行程 (往返)	H		W	L	G	F	M×F	H ₂	O ₁	l _a	N	P	M×P	a	b	h	C	d	D	l ₁	l ₂	IATD		IAT					
																										安装 孔数	d	l ₁	l ₂	安装 孔数	
沉孔型 IATD	1025	12	8±0.1	20±0.1	25	3.5	18	1×18	14	M2.6	3	7.5	10	1×10	3.5	7.5	4	6.6	2.5	4.1	3.5	—	2	M2.6	5	7.5	3				
	1035	18	8±0.1	20±0.1	35	3.5	28	1×28	14	M2.6	3	7.5	10	2×10	3.5	7.5	4	6.6	2.5	4.1	5	—	2	M2.6	7.5	10	3				
	1045	25	8±0.1	20±0.1	45	12.5	20	1×20	14	M2.6	3	7.5	10	3×10	3.5	7.5	4	6.6	2.5	4.1	3.5	6.5	4	M2.6	7.5	10	4				
	2035	18	12±0.1	30±0.1	35	3.5	28	1×28	22	M3	5	10	15	1×15	5.5	11.5	6	12	3.5	6	5	—	2	M3	7.5	20	2				
螺纹孔型 IAT	2050	30	12±0.1	30±0.1	50	3.5	43	1×43	22	M3	5	10	15	2×15	5.5	11.5	6	12	3.5	6	7.5	—	2	M3	10	15	3				
	2065	40	12±0.1	30±0.1	65	17.5	30	1×30	22	M3	5	10	15	3×15	5.5	11.5	6	12	3.5	6	5	11	4	M3	10	15	4				
	3055	30	16±0.1	40±0.1	55	7.5	40	1×40	30	M4	7	15	25	1×25	7.5	15.5	8	16	4.5	7.5	7.5	—	2	M4	10	35	2				
	3080	45	16±0.1	40±0.1	80	7.5	65	1×65	30	M4	7	15	25	2×25	7.5	15.5	8	16	4.5	7.5	6	12.5	4	M4	15	25	3				

No.	静态容许力矩			基本额定负载		精度	
	MA N·m	Mb N·m	Mc N·m	C(动) N	Co(静) N	指示值A (μm)	指示值B (μm)
1025	1.79	1.79	1.79	465	478	2	4
1035	4.18	4.18	3.59	807	956		5
1045	5.38	5.38	4.48	962	1195		4
2035	7.04	7.04	7.63	1101	1174		5
2050	11.7	11.74	11.4	1521	1761		4
2065	16.4	16.4	15.3	1908	2348	5	4
3055	33.8	33.8	35.3	3617	4062		5
3080	60.9	60.9	58.9	5409	6770		5

国际单位1N = 0.102kgf



A: 滑台中央部的平行度(μm)
B: 侧面的平行度(μm)



邮箱: Service@srdfaa.com



传真: 0755-8957-5523

SRD仕瑞达