




■ 六角型



代码	材质	表面处理
BDLHA	S45C	发黑
BDPLHA		无电解镀锌
BDSLHA	SUS304	—

6.3/(1.6/)

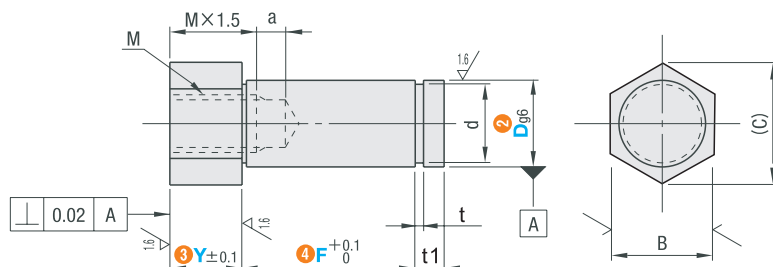

型号	②Dg6		最小单位 1mm		M (粗牙螺纹)	a	B	(C)	d		t	t1
① 代码			③Y	④F					基准尺寸	公差		
BDLHA BDPLHA BDSLHA	6	—0.004 —0.012	2~60	5~100	M3	5	8	9.2	5	+0.075 0	0.7	2
	8	—0.005 —0.014			M4		10	11.5	7	+0.090 0	0.9	3
	10				M6		13	15.0	9.6	0 —0.090	1.15	
	12	—0.006 —0.017	M8	14	16.2	11.5	0 —0.110					
	15		M10	17	19.6	14.3						
	20	—0.007 —0.020	4~60	M12	7	24	27.7	19	0 —0.210	1.35		



型号(①代码·②D) — ③Y — ④F — (APC·SET)
BDLHA15 — 20 — F22 — APC

可选加工		挡圈组件																					
代码	APC	SET																					
技术说明	在座面部分嵌入加工。 ① 所有型号适用指定方法 APC																						
	<table><tr><td>D</td><td>M</td><td>APC g6</td></tr><tr><td>6</td><td>M 3</td><td>6</td></tr><tr><td>8</td><td>M 4</td><td>8</td></tr><tr><td>10</td><td>M 6</td><td>10</td></tr><tr><td>12</td><td>M 8</td><td>12</td></tr><tr><td>15</td><td>M10</td><td>15</td></tr><tr><td>20</td><td>M12</td><td>20</td></tr></table>	D	M	APC g6	6	M 3	6	8	M 4	8	10	M 6	10	12	M 8	12	15	M10	15	20	M12	20	附带符合轴径的挡圈。 指定方法 SET ① 所有型号适用 挡圈形状 No.6・8(D=6・8): E型挡圈 No.10~20(D=10~20): C型挡圈
	D	M	APC g6																				
	6	M 3	6																				
8	M 4	8																					
10	M 6	10																					
12	M 8	12																					
15	M10	15																					
20	M12	20																					
挡圈材质																							
<table><tr><td colspan="2">悬臂销</td><td>挡圈</td></tr><tr><td>材质</td><td>表面处理</td><td>材质</td></tr><tr><td rowspan="2">S45C</td><td>发黑</td><td>弹簧钢</td></tr><tr><td>无电解镀锌</td><td rowspan="2">SUS304—CSP</td></tr><tr><td>SUS304</td><td>—</td></tr></table>		悬臂销		挡圈	材质	表面处理	材质	S45C	发黑	弹簧钢	无电解镀锌	SUS304—CSP	SUS304	—									
悬臂销		挡圈																					
材质	表面处理	材质																					
S45C	发黑	弹簧钢																					
	无电解镀锌	SUS304—CSP																					
SUS304	—																						

