



■ 请按步骤①~④选择型号和参数后进行订购。

链条 节数指定型 **CEE80** — 链条数 **200**

链轮 型号(①代码·②齿数) **CE80B15** — ③规格 **N** — ④轴孔直径 **40**




7 天发货

■ 链条80B



代码	材质
CEE80	钢
CEEH80	钢

CEEH是强度高于CEE的链条。

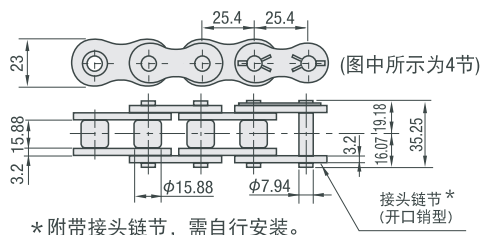

■ 节数指定型

型号	节数指定 (指定偶数)	h	m	n	t	容许 最大张力(kN)	节距(p)
(链条) CEE80	4~	16.07	19.18	35.25	3.2	14.71	25.4
(链条) CEEH80	4~	17.70	20.80	38.50	4.0	16.67	



■ 链轮80B



■ 轴孔加工尺寸表


轴孔直径D	键槽b2×t2	固定螺丝M
25~30	8×3.3	8
32~38	10×3.3	8
40~42	12×3.3	8
45~50	14×3.8	10

代码	材质	附件
CE80B	S45C (齿顶高频淬火)	固定螺丝 (仅轴孔规格N)



轴孔规格 **④S**
(底孔)

轴孔规格 **④N**
(新JIS键+螺纹孔)



① 齿顶和键槽的偏移量为±0.5mm

型号		③轴孔规格	④轴孔直径										Dp	Do	毂			ℓ	
① 代码	②齿数		S规格 (DH6)	N规格 (DH7)											H	GD	L		
CE80B	* 9	S N	14	25	28	30	32						74.27	85	58	44	40	7	
	10		15	25	28	30	32						82.19	93	52	—		12	
	11		15	25	28	30	32	35	38				90.16	102	60				
	12		15	25	28	30	32	35	38	40	42			98.14	110				67
	13		16	25	28	30	32	35	38	40	42	45	50	106.14	118				77
	14		16	25	28	30	32	35	38	40	42	45	50	114.15	127				
	15		20	25	28	30	32	35	38	40	42	45	50	122.17	135				
	16		20	25	28	30	32	35	38	40	42	45	50	130.2	143				93
	17		20	25	28	30	32	35	38	40	42	45	50	138.23	151				
	18		20	25	28	30	32	35	38	40	42	45	50	146.27	159				
	19		20	25	28	30	32	35	38	40	42	45	50	154.32	167				
	20		20	25	28	30	32	35	38	40	42	45	50	162.37	176				
	21		20	25	28	30	32	35	38	40	42	45	50	170.42	184				



邮箱: Service@srdfaa.com



传真: 0755-8957-5523

SRD仕瑞达