



转轴

一端内螺纹·带键槽型

D公差 h9/h7/g6

■ 请按步骤①~⑩选择型号和参数后进行订购。



带1处键槽
带2处键槽
带3处键槽

型号(①代码·②D)	③L	④M	键槽1 ⑤KA	键槽2 ⑥A	键槽3 ⑦KB	⑧B	⑨KC	⑩C
BCSGKRT10	325	M4	KA20	A50				
BCPSHKRT30	300	M10	KA20	A20	KB120	B20		
BCSSGKRT25	350	M10	KA10	A10	KB90	B30	KC210	C30



型号区分:
交期

7天发货


转轴

11



代码	D公差	材质	表面处理
①	h9	S45C	发黑
			无电解镀镍
②	h7	S45C	发黑
		SUS304	无电解镀镍
			—
③	g6	S45C	发黑
		SUS304	无电解镀镍
			—

① D部表面粗糙度h9为 $\frac{2.5}{\sqrt{R}}$ ，h7、g6为 $\frac{1.6}{\sqrt{R}}$ 。

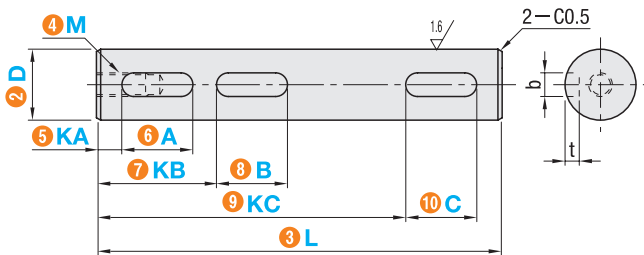

① h9

① 代码	型号		③ L 最小单位0.1mm	④ M (粗牙螺纹) 选择						键槽① ⑤ KA · ⑥ A		键槽② ⑦ KB · ⑧ B		键槽③ ⑨ KC · ⑩ C	
	② Dh9 公差	最小单位0.1mm		选择						最小单位0.1mm		最小单位0.1mm		最小单位0.1mm	
BCSMKRT BCPSMKRT	6	-0.030	15.0~400.0	2.6	3	4									
	8	0	15.0~500.0	2.6	3	4	5	6							
	10	-0.036	15.0~600.0		3	4	5	6							
	12	0	15.0~700.0		4	5	6	8							
	15	-0.043	15.0~800.0		4	5	6	8							
	20	0	30.0~1000.0		4	5	6	8	10						
	25	-0.052	50.0~1000.0		4	5	6	8	10	12					
	30	0	60.0~1000.0		6	8	10	12	16						
	35	-0.062	70.0~1000.0		6	8	10	12	16	20					
											KA+A≤L	KB+B≤L	KC+C≤L		
											KA≥0	KB≥KA+A	KC≥KB+B		
										b≤A≤100	b≤B≤100	b≤C≤100			

② h7

① 代码	型号		③ L 最小单位0.1mm	④ M (粗牙螺纹) 选择						键槽① ⑤ KA · ⑥ A		键槽② ⑦ KB · ⑧ B		键槽③ ⑨ KC · ⑩ C	
	② Dh7 公差	最小单位0.1mm		选择						最小单位0.1mm		最小单位0.1mm		最小单位0.1mm	
BCSHKRT BCPSHKRT BCSSHKRT	6	-0.012	15.0~400.0	2.6	3	4									
	8	0	15.0~500.0	2.6	3	4	5	6							
	10	-0.015	15.0~600.0		3	4	5	6							
	12	0	15.0~700.0		4	5	6	8							
	15	0	15.0~800.0		4	5	6	8							
	17	-0.018	30.0~900.0		4	5	6	8	10	12					
	20	0	30.0~1000.0		4	5	6	8	10	12	16				
	25	0	50.0~1000.0		4	5	6	8	10	12	16				
	30	-0.021	60.0~1000.0		6	8	10	12	16						
	35	0	70.0~1000.0		6	8	10	12	16	20					
	40	0	80.0~1000.0		10	12	16	20	24						
50	-0.025	100.0~1000.0		12	16	20	24	30							
										KA+A≤L	KB+B≤L	KC+C≤L			
										KA≥0	KB≥KA+A	KC≥KB+B			
										b≤A≤100	b≤B≤100	b≤C≤100			

③ g6

① 代码	型号		③ L 最小单位0.1mm	④ M (粗牙螺纹) 选择						键槽① ⑤ KA · ⑥ A		键槽② ⑦ KB · ⑧ B		键槽③ ⑨ KC · ⑩ C	
	② Dg6 公差	最小单位0.1mm		选择						最小单位0.1mm		最小单位0.1mm		最小单位0.1mm	
BCSGKRT BCPSGKRT BCSSGKRT	6	-0.004	15.0~400.0	2.6	3	4									
	8	-0.005	15.0~500.0	2.6	3	4	5	6							
	10	-0.014	15.0~600.0		3	4	5	6							
	12	0	15.0~700.0		4	5	6	8							
	13	0	15.0~700.0		4	5	6	8							
	15	-0.006	15.0~800.0		4	5	6	8							
	16	-0.017	15.0~900.0		4	5	6	8	10						
	17	0	30.0~900.0		4	5	6	8	10	12					
	18	0	30.0~900.0		4	5	6	8	10	12					
	20	0	30.0~1000.0		4	5	6	8	10	12	16				
	22	-0.007	40.0~1000.0		4	5	6	8	10	12	16				
25	-0.020	50.0~1000.0		4	5	6	8	10	12	16					
30	0	60.0~1000.0		6	8	10	12	16							
35	-0.009	70.0~1000.0		6	8	10	12	16	20						
40	0	80.0~1000.0		10	12	16	20	24							
50	-0.025	100.0~1000.0		12	16	20	24	30							
										KA+A≤L	KB+B≤L	KC+C≤L			
										KA≥0	KB≥KA+A	KC≥KB+B			
										b≤A≤100	b≤B≤100	b≤C≤100			

询价④种方式



官网 <http://www.srdfaa.com>
深圳市仕瑞达自动化设备有限公司



全国免费 400-966-3863
客服热线 0755-27926613