



# 定位销/夹具衬套

## 定位销 大头圆锥型 标准·P尺寸固定



型号(1代码·2D) — (3P)  
 DAJRBB10 — 12  
 DACJRBPB12 — 16

■请按步骤①~③选择型号和参数后进行订购。



型号区分: 7天发货  
 代码

定位销  
 夹具衬套



20



■D尺寸公差

D	m6	p6
2	+0.008	+0.012
3	+0.002	+0.006
4	+0.012	+0.020
5	+0.004	+0.012
6		
8	+0.015	+0.024
10	+0.006	+0.015
12		
13	+0.018	+0.029
16	+0.007	+0.018
20	+0.021	+0.035
	+0.008	+0.022

代码		材质	表面处理	硬度
D尺寸m6	D尺寸p6			
DAJRBB	DAJRBPB	SKS3	—	淬火硬度60~63HRC
DAGJRBB	DAGJRBPB	SKS3	镀铬 厚度3μm以上	淬火硬度50~55HRC 镀层硬度750HV~
DACJRBB	DACJRBPB	SUS440C	—	淬火硬度50~55HRC
DASJRBB	DASJRBPB	SUS304	—	—

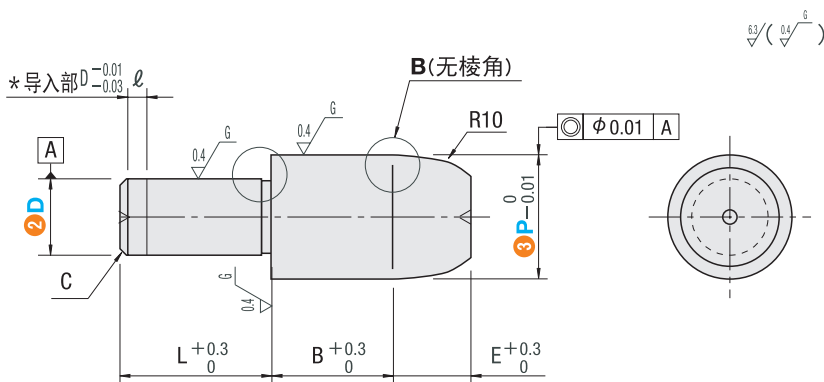

型号		L	B	E	l	C
1代码	2D					
<m6> DAJRBB DAGJRBB DACJRBB DASJRBB	<p6> DAJRBPB DAGJRBPB DACJRBPB DASJRBPB	4	3	3	0	0.5
		5	5	3	1	0.5
		5	6	4	1	1
		10	6	4	1	1
		10	8	5	1	1
		15	8	5	1	1.5
		15	10	5	1	2
		15	10	6	1	2
		22	10	6	2	2
		22	10	7	2	3
30	15	7	2	3		

