



定位销/夹具衬套

定位销 大头锥角型 标准/P尺寸固定型



型号(①代码·②D) — ③P选择
DABB6 — 10
DABB8 — 12

■请按步骤①~③选择
型号和参数后进行订购。



型号区分: 7 天发货
代码

定位销
夹具衬套



20



代 码				材质	表面处理	硬度
圆型		多棱型				
D尺寸m6	D尺寸p6	D尺寸m6	D尺寸p6			
DABB	DABPB	DADB	DADPB	SKS3	—	淬火硬度60～63HRC
DAGBB	DAGBPB	DAGDB	DAGDPB	SKS3	镀硬铬 厚度3 μ m以上	淬火硬度50～55HRC 镀层硬度750HV～
DACBB	DACBPB	DACDB	DACDPB	SUS440C	—	淬火硬度50～55HRC
DASBB	DASBPB	DASDB	DASDPB	SUS304	—	—

■D尺寸公差

D	m6	p6
1		
2	+0.008 +0.002	+0.012 +0.006
3		
4	+0.012 +0.004	+0.020 +0.012
5		
6		
8	+0.015 +0.006	+0.024 +0.015
10		
12	+0.018 +0.007	+0.029 +0.018
13		
16		
20	+0.021 +0.008	+0.035 +0.022

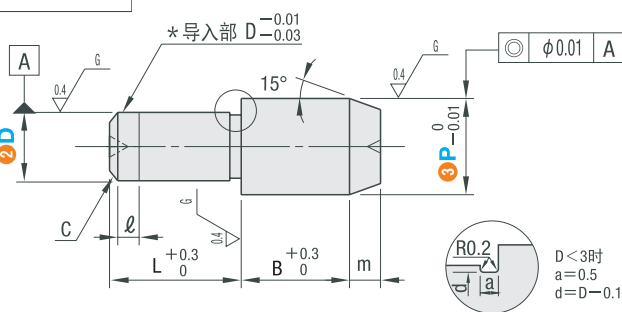

型号		③P选择		L	B	m	ℓ	C	(W)
①代码	②D								
	1	2		3	3	0.5	0	0.1	—
	2		3 4	4	3	1	0	0.5	1.2
	3		4 5 6	5	5	2	1	0.5	1.5
	4		5 6	5	6	3	1	1	1.8
	5		6 8	10	6	3	1	1	2.2
	6		8 10	10	8	3	1	1	3
	8		10 12 13	15	8	4	1	1.5	3.5
	10		12 13 15	15	10	4	1	2	4
	12		13 15 16	15	10	4	1	2	5
	13		15 16	22	10	4	2	2	5.5
	16		20 25	22	10	5	2	3	7
	20		25 30	30	15	5	2	3	9

询价④种方式



官网 <http://www.srdfaa.com>
深圳市仕瑞达自动化设备有限公司



全国免费 400-966-3863
客服热线 0755-27926613