



型号(代码·No.)
IAXG60




型号区分:
代码 **7** 天发货

■标准型



■精度基准




代码	主体		导向轴	弹簧	压紧丝杠		附件
	材质	表面处理	材质	材质	材质	表面处理	
IAXG	铝合金	黑色阳极氧化处理	SUS303	SUS304	S45C	无电解镀镍	内六角螺栓


No.20、**25** 短头内六角螺栓

No.40、**60** 超短头内六角螺栓


No.20

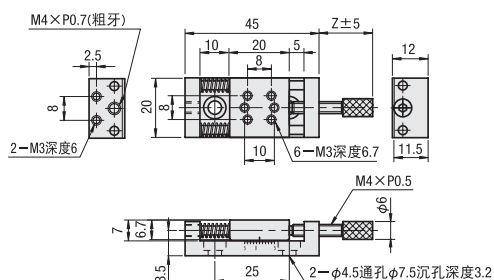


No.25

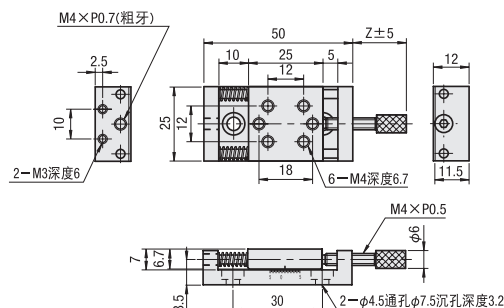

No.40

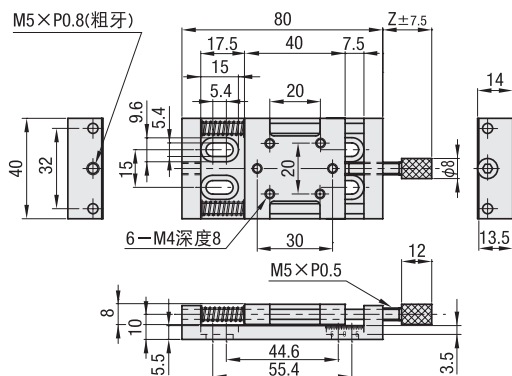

No.60

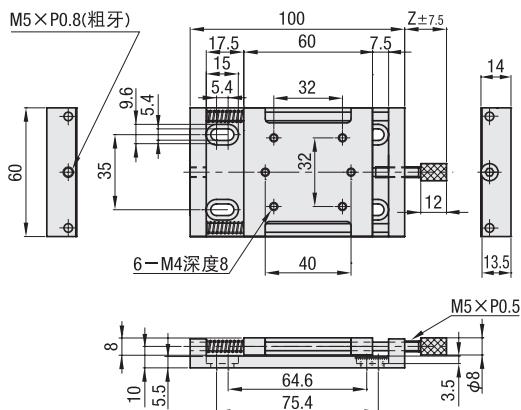

简易调整组件

25

型号		Z (mm)	滑台面 (mm)	行程 (mm)	耐负载(N)		自重 (kg)
代码	No.				水平	垂直	
(标准型) IAXG	20	18	20×20	±5	9.8	2	0.04
	25	18	25×25	±5	9.8	2	0.06
	40	27	40×40	±7.5	14.7	8	0.10
	60	27	60×60	±7.5	14.7	8	0.20

① 刻度单位: 0.5mm ② 旋钮旋转1圈的移动量0.5mm



邮箱: Service@srdfaa.com



传真: 0755-8957-5523

SRD仕瑞达