



悬臂销/铰链销/支点用台阶螺丝

支点用台阶螺丝 自由指定型


悬臂销·铰链销
支点用台阶螺丝

12



一字槽 D ₁ = 0.01 D ₂ = 0.05	内六角孔 D ₁ = 0.01 D ₂ = 0.05	两平面 D ₁ = 0.01 D ₂ = 0.05	六角头 D ₁ = 0.01 D ₂ = 0.05	材质	硬度	表面处理
BDFBBD	BDFBDW	BDFBDR	BDFBDL	S45C	—	发黑
BDFBD	BDFBW	BDFBR	BFDL	SUS303	—	—

25/(6.3/1.6/)

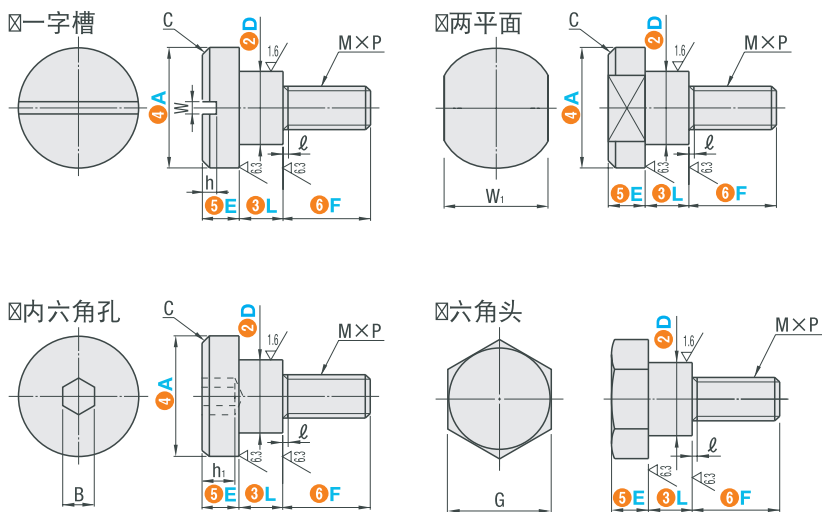

型号(1代码·2D) — (3L) — (4A) — (5E) — (6F) ■ 请按步骤①~③选择
BDFBD6 — 10.0 — A12 — E3.0 — F4 型号和参数后进行订购。



型号区分: 7 天发货

型号		3L 最小单位0.1mm	4A选择	5E 最小单位0.1mm	6F 最小单位1mm	M×P (粗牙螺纹)	ℓ	W	B	h	h1	C	W1	G
1 代码	2 D													
一字槽(普通级) 两平面(普通级) BDFBBD BDFBD	4	一字槽 两平面 六角头 1.0~20.0 内六角孔 5.0~20.0	6 8	2.0~4.0	3·4	2.6×0.45	0.8	0.8	2	1	2	0.5	5	7
	5		8 10		3~6	3×0.5	1		2.5		2.5		7	8
	6		10 12	2.5~4.5	4~8	4×0.7	1.2	1.2	3	1.5	3	1	8	10
	8		12 16		5~10	5×0.8	1.4		4		3.5		10	13
内六角孔(普通级) 六角头(普通级) BDFBDW BDFBDL	10		16 18 20	3.0~5.0	6~12	6×1.0	1.5	1.5	5	2	4	1	13	17
	12		18 20 22 24		8~12	8×1.25							14	19
	13		20 22 24		10~15	10×1.5							15	
	15												17	



型号(1代码·2D) — (3L) — (4A) — (5E) — (6F) — (PC)
BDFBBD6 — 10.0 — A12 — E3.0 — F4 — PC

可选加工	代码	技术说明
	PC	对M尺寸部进行根部退刀槽加工。
		D M×螺距 g f
		4 M2.6×0.45 1 1.9
		5 M3×0.5 1 2.3
		6 M4×0.7 1.2 3.2
		8 M5×0.8 1.4 4.0
		10 M6×1.0 1.7 4.8
		12·13 M8×1.25 1.7 6.5
		15 M10×1.5 2 8.2

询价④种方式



官网 <http://www.srdfaa.com>
深圳市仕瑞达自动化设备有限公司



全国免费 400-966-3863
客服热线 0755-27926613