



定位销/夹具衬套

定位销 大头锥角型 锥角指定·DP公差选择



■ 请按步骤①~④选择型号和参数后进行订购。


型号(①代码·②D公差·③P公差·④D) — ⑤P — ⑥L — ⑦B — ⑧E — ⑨A°
DAKAMS6 — P10.00 — L6 — B3.0 — E5.0 — A30
DASKDGS10 — B14.00 — L15 — B5.0 — E5.0 — A45



型号区分: 7 天发货
代码

定位销
夹具衬套


20




代码		材质	表面处理	硬度
圆型	多棱型			
DAKA	DAKD	SKS3	—	淬火硬度60~63HRC
DAGKA	DAGKD	SKS3	镀硬铬 厚度3 μm以上	淬火硬度50~55HRC 镀层硬度750HV~
DACKA	DACKD	SUS440C	—	淬火硬度50~55HRC
DASKA	DASKD	SUS304	—	—

■ 公差选择


D 或 P	②·③D·P公差				
	M	P	G	H	S
	m6	p6	g6	h7	—
1.00~3.00	+0.008 +0.002	+0.012 +0.006	-0.002 -0.008	0 -0.010	-0.01
3.01~6.00	+0.012 +0.004	+0.020 +0.012	-0.004 -0.012	0 -0.012	
6.01~10.00	+0.015 +0.006	+0.024 +0.015	-0.005 -0.014	0 -0.015	
10.01~18.00	+0.018 +0.007	+0.029 +0.018	-0.006 -0.017	0 -0.018	
18.01~30.00	+0.021 +0.008	+0.035 +0.022	-0.007 -0.020	0 -0.021	

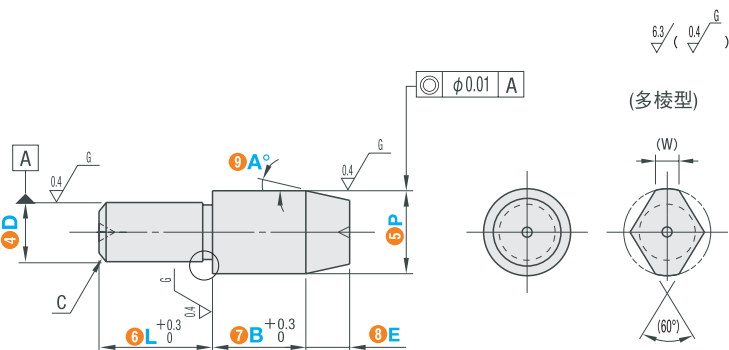

(i) D=P但公差不同时




(ii) D=P但公差相同时



(L+B)为一般公差。

(2)多棱型带退刀槽。



D < 3时
a = 0.5
d = D - 0.1
D ≥ 3时
a = 1.0
d = D - 0.2

型号											
① 代码		②D公差 选择	③P公差 选择	④D	⑤P 最小单位0.01mm	⑥L 最小单位1mm	⑦B 最小单位0.1mm	⑧E 最小单位1mm	⑨A° 选择	C	(W)
<圆型> DAKA DAGKA DACKA DASKA	<多棱型> DAKD DAGKD DACKD DASKD	M P G H	S M P G H	1	1.00~3.00 (1.50~2.50)	2・3	1.5~5.0	0.5~15.0	15 30 45 60	0.1	0.6
				2	2.00~6.00 (4.00)	2~6	1.5~15.0 (10.0)			0.5	1.2
				3	3.00~8.00	3~10	1.5~15.0 (10.0)				1.5
				4	4.00~8.00	3(4)~14	1.5~15.0 (10.0)				1.8
				5	5.00~10.00	5~15	1.5~15.0 (10.0)			1	2.2
				6	6.00~10.00	5~15	1.5~30.0 (15.0)				3
				8	8.00~15.00	5(6)~16	1.5~30.0 (15.0)				1.5
				10	10.00~17.00	5(10)~20	3.0~30.0 (25.0)			4	
				12	12.00~18.00	6(10)~24	3.0~30.0 (25.0)			2	
				13	13.00~20.00	7(12)~26	5.0~30.0 (25.0)				5.5
				16	16.00~27.00	8(15)~32	5.0~30.0				7
				20	20.00~30.00	10(15)~40	5.0~30.0			3	9

①P·L·B()尺寸适用于多棱型。

询价④种方式



官网 <http://www.srdfaa.com>
深圳市仕瑞达自动化设备有限公司



全国免费 400-966-3863
客服热线 0755-27926613