



直线导轨

微型直线导轨 标准滑块型




型号(①代码·②H) — ③L
AGMP10 — 275

■ 请按步骤①~③选择型号和参数后进行订购。





型号区分: ④代码 7 天发货

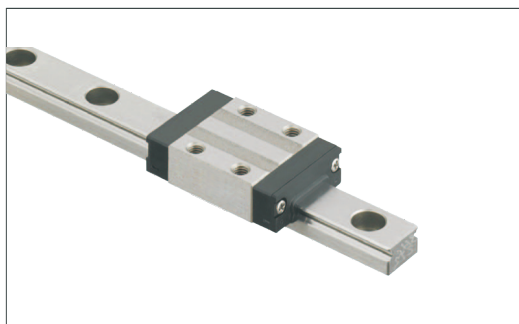

材质 硬度	代码		滑块 数量
	微预压型	普通间隙型	
	精密级	普通级	
不锈钢 56HRC~	AGMP	AGMC	1
	AGM2P	AGM2C	2

耐热温度: -20~80℃

H6型

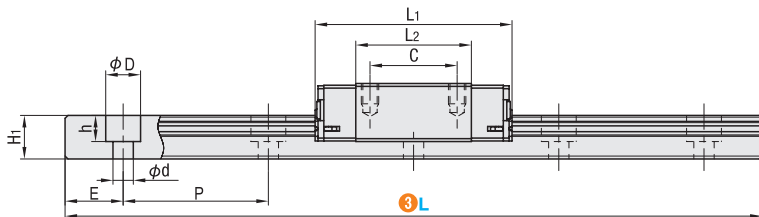


型号		②H	③L	滑块尺寸							导轨尺寸					
① 代码	W			L ₁	B	C	S×ℓ	L ₂	K	W ₁	W ₂	H ₁	沉孔 d×D×h	P	E	
(单滑块) AGMP AGMC	(双滑块) AGM2P AGM2C	6	25~100	12	19	8	—	M2×1.5	12.6	1.2	5	3.5	3.7	2.4×3.5×1	15	最小单位1mm。 (E尺寸为两端均分)
		8	40~130	17	23.5	12	8	M2×2.5	14.3	1.5	7	5	5	2.4×4.2×2.3	15	
		10	35~275	20	30	15	10	M3×3	20.8	2.2	9	5.5	6	3.5×6×3.5	20	
		13	45~470	27	34	20	15	M3×3.5	21.6	2.7	12	7.5	8	3.5×6×4.5	25	
		16	70~670	32	42	25	20	M3×4	27.9	3.1	15	8.5	10	3.5×6×4.5	40	
		20	100~700	40	50	30	25	M4×6	34.6	15	20	10	11	6×9.5×5.5	60	

国际单位1N=0.102kgf


■ 预压与精度基准

单位: μm

H	基本额定负载		静态容许力矩			重量	
	C (动) kN	Co (静) kN	MA N·m	MB N·m	Mc N·m	滑块 kg	导轨 kg/m
6	0.27	0.5	0.75	0.75	1.4	0.004	0.13
8	0.8	1.3	4.0	4.0	5.1	0.01	0.19
10	1.3	2.3	5.0	10.0	0.27	0.02	0.31
13	2.0	3.0	8.6	9.0	16.0	0.04	0.61
16	3.2	5.0	20.7	23.27	39.5	0.06	1.02
20	2.0	8.0	46.2	46.5	85	0.12	1.65



规格	微预压型 精密级	普通间隙型 普通级
高度H的尺寸公差	±20	±40
宽度W2的尺寸公差	±25	±40
成对高度H公差	±15	±30
成对高度W2公差	±20	±30

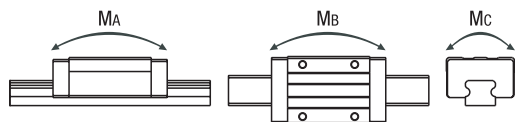

询价④种方式



官网 <http://www.srdfaa.com>
深圳市仕瑞达自动化设备有限公司



全国免费 400-966-3863
客服热线 0755-27926613