


带座轴承 ▶ 轴承、轴承座组件

双轴承T型高度选择型



代码	材质	表面处理
宽度T选择 · 高度h选择型	轴承	固定座
BBHWB	钢	S45C
BBHW		发黑
BBHWA		无电解镀锌
	铝合金	本色阳极氧化处理

6.3/ (1.6/)

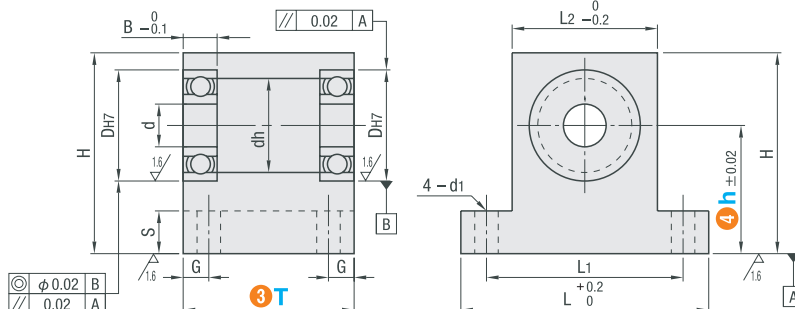

型号(1代码·2轴承型号) — 3 T — 4 h
BBHW6202ZZ — 35 — 40

■ 请按步骤①~④选择型号和参数后进行订购。



型号区分: 7 天发货

型号		宽度	高度	d	H	L ₁	d ₁	L	L ₄	S	dh	D _{H7}	B
① 代码	② 轴承型号	③ T	④ h										
BBHWB BBHW BBHWA	623ZZ	20 30	15 20 25	3	h+9	26	4.5	36	16	5	7	10	4
	624ZZ	20 30	15 20 25	4	h+11	28		38	18		9	13	5
	605ZZ	20 30	15 20 25	5	h+11	30		40	20		10	14	
	625ZZ	25 30	20 25 30	5	h+12	34	4.5	46	22	10	12	16	6
	606ZZ	25 35	20 25 30	6	h+13	35		47	23		13	17	
	626ZZ	25 35	20 25 30	6	h+14	37		49	25		15	19	
	608ZZ	25 35	20 25 30	8	h+15	41	5.5	53	29	10	18	22	7
	628ZZ	25 35	20 25 30	8	h+16	44		56	32		20	24	8
	6900ZZ	25 40	20 30 40	10	h+15	41		53	29		19	22	6
	6000ZZ	25 40	20 30 40	10	h+17	46	5.5	58	34	10	22	26	8
	6200ZZ	30 40	20 30 40	10	h+19	50		62	38		24	30	9
	6901ZZ	25 40	20 30 40	12	h+16	44		56	32		21	24	6
	6001ZZ	25 40	20 30 40	12	h+18	48	5.5	60	36	15	24	28	8
	6201ZZ	30 40	20 30 40	12	h+20	52		64	40		26	32	10
	6902ZZ	25 50	30 40 50	15	h+18	48		60	36		25	28	7
	6002ZZ	30 50	30 40 50	15	h+20	54	6.5	68	40	15	28	32	9
	6202ZZ	35 50	30 40 50	15	h+22	58		72	44		29	35	11
	6903ZZ	25 50	30 40 50	17	h+19	52		64	38		27	30	7
	6003ZZ	30 50	30 40 50	17	h+22	56	6.5	70	43	15	31	35	10
	6203ZZ	35 50	30 40 50	17	h+24	62		76	49		34	40	12
	6904ZZ	35 50	40 50 60	20	h+23	59		73	45		34	37	9
	6004ZZ	40 50	40 50 60	20	h+25	66	9	82	50	15	36	42	12
	6204ZZ	45 50	40 50 60	20	h+28	72		88	56		40	47	14
	6005ZZ	40 60	40 50 80	25	h+28	76		96	56		41	47	12
	6205ZZ	45 60	40 50 80	25	h+31	82	11	102	62	20	45	52	15
	6006ZZ	40 60	40 50 80	30	h+32	84		104	64		48	55	13
	6206ZZ	50 60	40 50 80	30	h+36	92		112	72		55	62	16
	6007ZZ	50 60	50 90	35	h+36	92	11	112	72	20	55	62	14
	6207ZZ	60 70	50 90	35	h+44	118	13	148	88	25	64	72	17
	6008ZZ	50 70	60 100	40	h+41	102	11	122	82	20	60	68	15
	6208ZZ	60 80	60 100	40	h+50	130	13	160	100	25	74	80	18



型号(1代码·2轴承型号) — 3 T — 4 h — (KCC · KCC · NA)
BBHW6202ZZ — 35 — 40 — NA

可选加工	加工倒角C		加工倒角C2	无轴承型
代码	KKC		KCC	NA
技术说明	加工上端两侧倒角C(45°) 指定方法 KKC		加工上端面倒角C2	固定座中不组装轴承， 作为附件发货。
	d	KKC		
	3~8	5		
	10~20	10		
	25~40	12		
	① 仅6207ZZ、6208ZZ型号的轴承适用于 KKC15。			



邮箱: Service@srdfaa.com



传真: 0755-8957-5523

SRD仕瑞达