



型号 (1 代码 · 2 M) — (3 H)
DBJST8 — 25

■ 请按步骤①~③选择型号和参数后进行订购。




型号区分: 7 天发货
代码

■ 调整螺栓



螺纹	代码	材质	表面处理
粗牙 螺纹	DBJST	S45C	发黑
	DBJSTM		无电解镀镍
	DBJSTS	SUS304	—
细牙 螺纹	DBJSTF	S45C	发黑
	DBJSTMF		无电解镀镍
	DBJSTFS	SUS304	—

25 / (16 /)

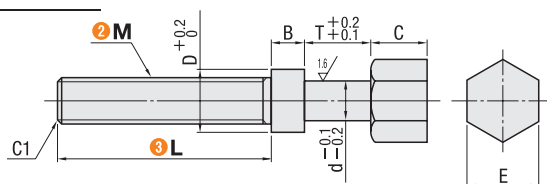

型号		③ L 最小单位 5mm	d	T	M × 螺距		B	D	C	E	粗牙螺纹			细牙螺纹		
① 代码	② M				细牙螺纹	粗牙螺纹					DBJST	DBJSTM	DBJSTS	DBJSTF	DBJSTMF	DBJSTFS
(粗牙螺纹)	3	10~45	2.5	7	—	3×0.5	3	4.5	5	6	●	●	●	—	—	—
DBJST	4	10~60	3.5	9	4×0.5	4×0.7	4.6	5.5	7	7	●	●	●	●	●	●
DBJSTM	5	10~70	4.5	9	5×0.5	5×0.8	4.6	7.5	10	8	●	●	●	●	●	●
DBJSTS	6	15~80	5.5	12	6×0.75	6×1.0	6	8.5	10	10	●	●	●	●	●	●
(细牙螺纹)	8	20~80	7.5	12	8×0.75	8×1.25	6	11.5	15	13	●	●	●	●	●	●
DBJSTF	10	25~80	9.5	16	10×1.0	10×1.5	7	15.5	20	17	●	●	●	●	●	●
DBJSTMF	12	25~80	11.5	19	12×1.0	12×1.75	7	17.5	20	19	●	●	—	●	●	—
DBJSTFS	16	25~80	15.5	—	16×2.0	8	21.5	—	—	24	●	●	—	—	—	—



型号 (1 代码 · 2 D) — (3 L)
DBJP3 — 20

■ 请按步骤①~③选择型号和参数后进行订购。



型号区分: 7 天发货
代码

■ 调整销




代码	材质	附件
DBJP	SUS304	E型挡圈 (SUS304)
DBJPB		—

25 / (16 /)

DBJP (挡圈型)

DBJPB (螺帽固定型)

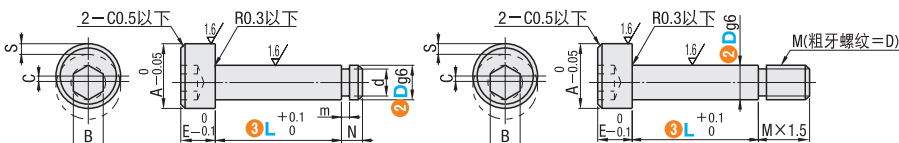

型号		③ L 最小单位 1mm	A	B	E	C	S	m公差	N	d公差
① 代码	② Dg6									
DBJP DBJPB (L ≥ 10)	3	-0.002 -0.008	5 (10) ~ 20	5.5	2.5	3.5	0.5	1	0.5	+0.05 0
	4	-0.004 -0.012	5 (10) ~ 25	7	3	4.5	0.7	1.4	0.7	+0.1 0
	5	-0.004 -0.012	10 ~ 30	8.5	4	5.5	1	2	0.7	+0.075 0
	6	-0.004 -0.012	10 ~ 35	10	5	6.5	1.3	2.6	0.7	+0.075 0
	8	-0.005 -0.014	10 ~ 40	13	6	8.5	1.6	3.2	0.9	+0.14 0

① DBJPB 为 L ≥ 10。② S 尺寸为通过内六角扳手使调整销 360° 旋转时的最大振幅。



邮箱: Service@srdfaa.com



传真: 0755-8957-5523

SRD 仕瑞达