


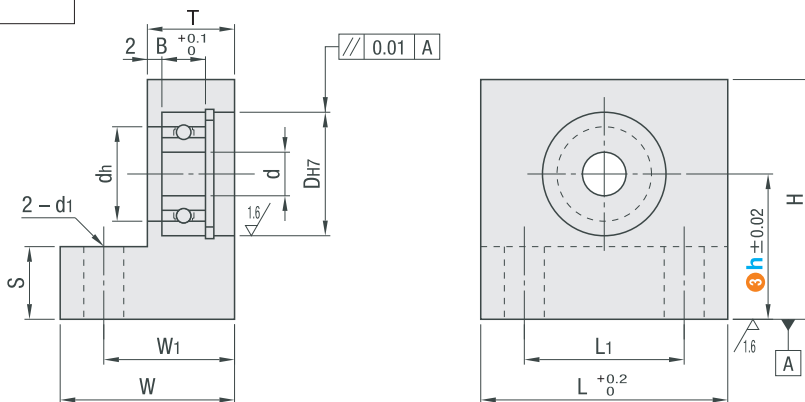

代码		材质		表面处理	附件
高度h选择型	高度h指定型	轴承	固定座	固定座	挡圈
BBLKB	BBLFB	钢	S45C	发黑	弹簧钢
BBLK	BBLF			无电解镀锌	SUS304
BBLKSA	—	不锈钢	铝合金	本色阳极氧化处理	

 $\sqrt{6.3}/(\sqrt{1.6})$ 

型号(①代码·②轴承型号) — ③h
BBLK600ZZ — 30

■ 请按步骤①~③选择型号和参数后进行订购。



型号区分: 7 天发货

型号		③h		d	H	L1	d1	L	W1	W	T	S	dh	Dh7	B
①代码	②轴承型号	高度选择型	高度指定型 单位1mm												
高度h选择型 BBLKB BBLK BBLKSA	623ZZ	15 20 25	15~30	3	h+9	10	4.5	20	15	20	10	5	7	10	4
	624ZZ			4	h+11	12		22	15	20	10		9	13	5
	605ZZ			5	h+11	14		24	15	20	10		10	14	5
	625ZZ	20 25 30	20~30	5	h+12	16	5.5	28	16	22	10	10	12	16	5
	606ZZ			6	h+13	22		34	18	24	12		13	17	6
	626ZZ			6	h+14	24		36	18	24	12		15	19	6
	608ZZ	25 30	25~30	8	h+15	26		38	18	24	12	10	18	22	7
	628ZZ			8	h+16	22		34	21	27	15		20	24	8
	6900ZZ			10	h+15	20		32	18	24	12		19	22	6
	6000ZZ	25 30 40	25~40	10	h+17	26	6.5	38	21	27	15	12.5	22	26	8
	6200ZZ			10	h+19	28		40	21	27	15		24	30	9
	6901ZZ			12	h+16	24		36	18	24	12		21	24	6
高度h指定型 BBLFB BBLF	6001ZZ	30 40 50	30~50	12	h+18	28	9	40	21	27	15	15	24	28	8
	6201ZZ			12	h+20	30		42	22	28	16		26	32	10
	6902ZZ			15	h+18	30		42	18	24	12	20	25	28	7
	6002ZZ	40 50	40~50	15	h+20	36	11	50	22	29	15		28	32	9
	6202ZZ			15	h+22	30		44	24	31	17		29	35	11
	6903ZZ			17	h+19	30		42	20	26	13	15	27	30	7
	6003ZZ	30 40 50	30~50	17	h+22	36	9	50	24	31	16		31	35	10
	6203ZZ			17	h+24	36		48	26	33	20		34	40	12
	6904ZZ			20	h+23	31		45	22	29	15	20	34	37	9
	6004ZZ	40 50 60	40~60	20	h+25	38	11	54	27	35	19		36	42	12
	6204ZZ			20	h+28	44		60	28	36	20		40	47	14
	6005ZZ			25	h+28	46		62	27	35	19	20	41	47	12
	6205ZZ	50 80	50~80	25	h+31	50	11	70	32	42	22		45	52	15
	6006ZZ			30	h+32	54		74	30	40	20		48	55	13
	6206ZZ			30	h+36	62		82	33	43	23		55	62	16



型号(①代码·②轴承型号) — ③h — (KKC·KCC·NA)
BBLF600ZZ — 30 — KKC

可选加工	加工倒角C	加工倒角C2	不装配轴承·挡圈
代码	KKC	KCC	NA
技术说明	加工上端两侧倒角C(45°) 指定方法 d KKC 3~8 5 10~20 10 25~30 12 ①仅高度h指定型适用	加工上端面 倒角C2	不将轴承、挡圈 装入固定座中， 而以附件形式发 货。



邮箱: Service@srdfaa.com



传真: 0755-8957-5523

SRD仕瑞达