

免键轴衬 直杆型 同步轮/同步带/免键轴衬



型号(代码 · d)
CBLA30




型号区分: 7 天发货




CBLA
CBLAP (无电解镀锌)

代码	主体	
	材质	表面处理
CBLA	S45C	—
CBLAP		无电解镀锌

拆卸用螺纹孔 *



锁紧螺栓 M×L

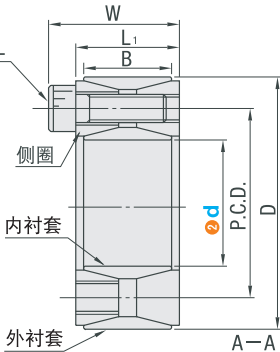

型号		D	W	P.C.D.	L ₁	B	锁紧螺栓				重量 (g)	■ 免键轴衬容许输入负载的确认				
代码	d						M×L	个数	内六角扳手 公称尺寸	紧固扭矩 (N·m)		d	容许最大扭矩 (N·m)	容许轴向负载 (kN)		
CBLA CBLAP	20	47	26	34.5	20	18	M6×18	8	5	12.7	240	20	300	29.5		
	22			34.5							230	22	330	29.5		
	24			37.5							250	24	410	33.8		
	25										240	25	430	33.8		
	28	55		42.5				10			290	28	530	37.8		
	30										280	30	570	37.8		
	32	60		47.5				12			340	32	730	45.4		
	35										310	35	800	45.4		
	38	65		52.5				14			370	38	1010	52.9		
	40										350	40	1060	52.9		
	42	75		60				12			600	42	1560	74.1		
	45										570	45	1670	74.1		
	48										80	65	630	48	1780	74.1
	50												610	50	1860	74.1
	55	85	32	70	24	21	M8×22	14	6	29.4	660	55	2530	91.8		
	60										700	60	2760	91.8		
	65										710	65	2990	91.8		
	65										710	65	2990	91.8		

国际单位1N=0.102kgf

d	轴侧面 压力 MPa	轮孔部 侧面压力 MPa	使用1个时				轮孔 加工深度 L ₁	使用2个时				轮孔 加工深度 L ₂
			H轮体最小外径					H轮体最小外径				
			轮体材料的屈服应力 (MPa)					轮体材料的屈服应力 (MPa)				
			147 FC250	206 FC350 SS400	294 FCD450 S35C	392 FCD600 S55C		147 FC250	206 FC350 SS400	294 FCD450 S35C	392 FCD600 S55C	
20	217	93	70	62	57	55	28	87	72	63	55	
22	198	93	70	62	57	55		83	69	62		58
24	207	100	77	68	62	59		85	72	65		61
25	199	100	77	68	62	59		98	82	72		67
28	199	101	86	75	68	65						
30	186	101	86	75	68	65						
32	209	111	98	84	76	72						
35	191	111	98	84	76	72		115	93	81	75	
38	205	120	112	94	84	79		109	90	79	74	
40	195	120	112	94	84	79		126	101	88	81	
42	223	125	132	110	98	91	34	159	123	105	96	67
45	208	125	132	110	98	91		171	128	107	98	
48	195	117	135	115	103	96		170	131	112	102	
50	187	117	135	115	103	96		159	127	109	101	
55	211	136	160	130	114	106		200	147	123	111	
60	193	129	162	134	118	110		214	156	130	118	
65	178	122	165	138	123	115		211	159	134	123	

国际单位1N=0.102kgf



邮箱: Service@srdfaa.com



传真: 0755-8957-5523

SRD仕瑞达