



定位销/夹具衬套

定位销 直杆球面型 标准型



型号 (1) 代码 · (2) D 寸公差 · (3) D) — (4) P
DALSQAM6

— L14.0

■ 请按步骤 1~4 选择型号和参数后进行订购。



型号区分:

代码


7 天发货

定位销
夹具衬套

20



代码	材质	表面处理	硬度
DALSQA	SKS3	—	淬火硬度60~63HRC
DAGLSQA	SKS3	镀硬铬 厚度3 μm 以上	淬火硬度50~55HRC 镀层硬度 750HV~
DACLSQA	SUS440C	—	淬火硬度50~55HRC
DASLSQA	SUS304	—	—

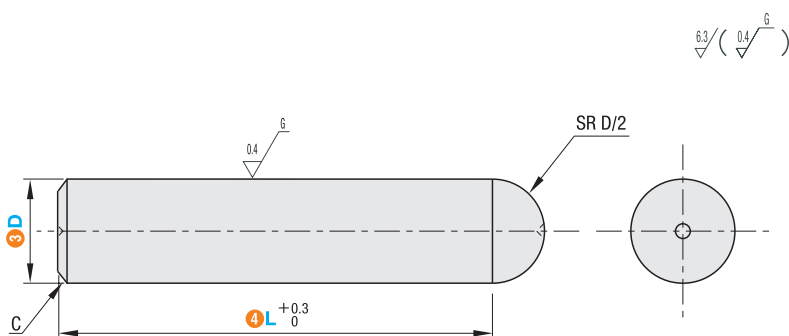

公差选择

D	2 D 尺寸公差			
	M	P	G	H
	m6	p6	g6	h7
3	+0.008 +0.002	+0.012 +0.006	-0.002 -0.008	0 -0.010
4 · 5 · 6	+0.012 +0.004	+0.020 +0.012	-0.004 -0.012	0 -0.012
8 · 10	+0.015 +0.006	+0.024 +0.015	-0.005 -0.014	0 -0.015

型号				
1 代码	2 D 公差	3 D	4 L 最小单位0.1mm	C
DALSQA DAGLSQA DACLSQA DASLSQA	M P G H	1	3.0~10.0	0.1
		2	3.0~20.0	0.5
		3	3.0~20.0	0.5
		4	3.0~25.0	1
		5	4.0~30.0	1
		6	5.0~40.0	1
		8	5.0~40.0	1.5
		10	5.0~40.0	2

询价 4 种方式



官网 <http://www.srdfaa.com>
深圳市仕瑞达自动化设备有限公司



全国免费 400-966-3863
客服热线 0755-27926613