

定位销 大头锥角型

内螺纹·锥角指定·DP公差指定

定位销/夹具衬套



定位销
夹具衬套

20



■ 请按步骤①~④选择型号和参数后进行订购。

型号(①代码·②D公差·③P公差·④No.) — ⑤P — ⑥L — ⑦B — ⑧E — ⑨A°
DAKTAMS10T — P13.00 — L6 — B4.0 — E10.0 — A15
DASKTGS12 — B15.00 — L12 — B5.0 — E7.0 — A45



型号区分: 7 天发货
代码





代码		材质	表面处理	硬度
圆型	多棱型			
DAKTA	DAKTD	SKS3	—	淬火硬度60~63HRC
DAGKTA	DAGKTD	SKS3	镀硬铬 厚度3 μm以上	淬火硬度50~55HRC 镀层硬度750HV~
DACKTA	DACKTD	SUS440C	—	淬火硬度50~55HRC
DASKTA	DASKTD	SUS304	—	—

■ 公差选择

D 或 P	②·③D·P公差				
	M	P	G	H	S
	m6	p6	g6	h7	—
6.00	+0.012 +0.004	+0.020 +0.012	-0.004 -0.012	0 -0.012	0 -0.01
6.01~10.00	+0.015 +0.006	+0.024 +0.015	-0.005 -0.014	0 -0.015	
10.01~18.00	+0.018 +0.007	+0.029 +0.018	-0.006 -0.017	0 -0.018	
18.01~30.00	+0.021 +0.008	+0.035 +0.022	-0.007 -0.020	0 -0.021	

■ 内螺纹底孔表

螺纹直径	M3	M4	M5	M6	M8
底孔直径d2	2.6	3.4	4.3	5.1	6.9
底孔深度U	9.5	12	14.5	17	21

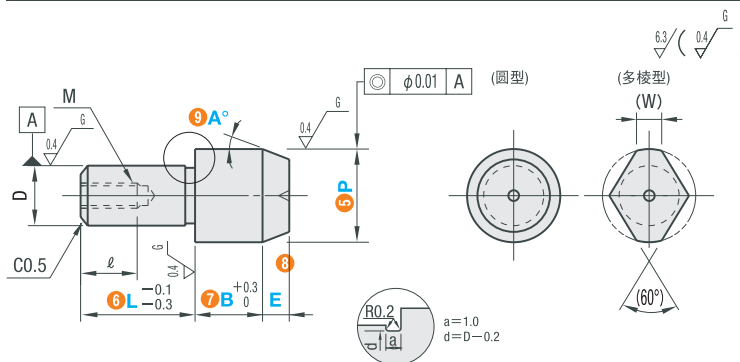

(i) D=P且公差不同时



(ii) D=P且公差相同时



(L+B)为一般公差。

(2)多棱型带退刀槽。



型号				⑤P 最小单位0.01mm	⑥L 最小单位1mm		⑦B 最小单位0.1mm	⑧E 最小单位0.1mm	⑨A° 选择	D	M (粗牙 螺纹)	ℓ	(W)
① 代码	② D 公差选择	③ P 公差选择	④ No.		圆型	多棱型							
<圆型> <多棱型> DAKTA DAKTD DAGKTA DAGKTD DACKTA DACKTD DASKTA DASKTD	M P G H	S M P G H	6	6.00~10.00	6~12	9~12	1.5~15.0 (12.0)	0.5~15.0	15 30 45 60	6	M3	5	3
			8	8.50~15.00	8~16	12~16	1.5~30.0 (15.0)			8	M5	8	3.5
			8T		6~16	12~16				8	M4	6	3.5
			10	10.00~17.00	10~20	12~20	3.0~30.0 (20.0)			10	M5	8	4
			10T		6~16	12~16				10	M4	6	4
			12	12.00~18.00	12~24	12~24	3.0~30.0 (20.0)			12	M5	8	5
			12T		8~18	12~18				12	M4	6	5
			13	13.00~20.00	13~26	14~26	5.0~30.0 (20.0)			13	M8	10	5.5
			13T		8~20	14~20				13	M6	9	5.5
			16	16.00~27.00	16~32	16~32	5.0~30.0 (27.0)			16	M8	12	7
			16T		10~24	14~24				16	M6	9	7
			20	20.00~30.00	20~40	20~40	5.0~30.0			20	M8	12	9
			20T		12~30	18~30				20	M6	9	9

①B()尺寸适用于多棱型。



邮箱: Service@srdfaa.com



传真: 0755-8957-5523

SRO仕瑞达