



同步轮/同步带/免键轴衬

同步齿形带用金属件 过压防止型




型号(①代码) —
CBCK

②皮带编号 · ③皮带公称宽度
XL025

■ 请按步骤①~④选择型号和参数后进行订购。



型号区分: 7 天发货
交货期

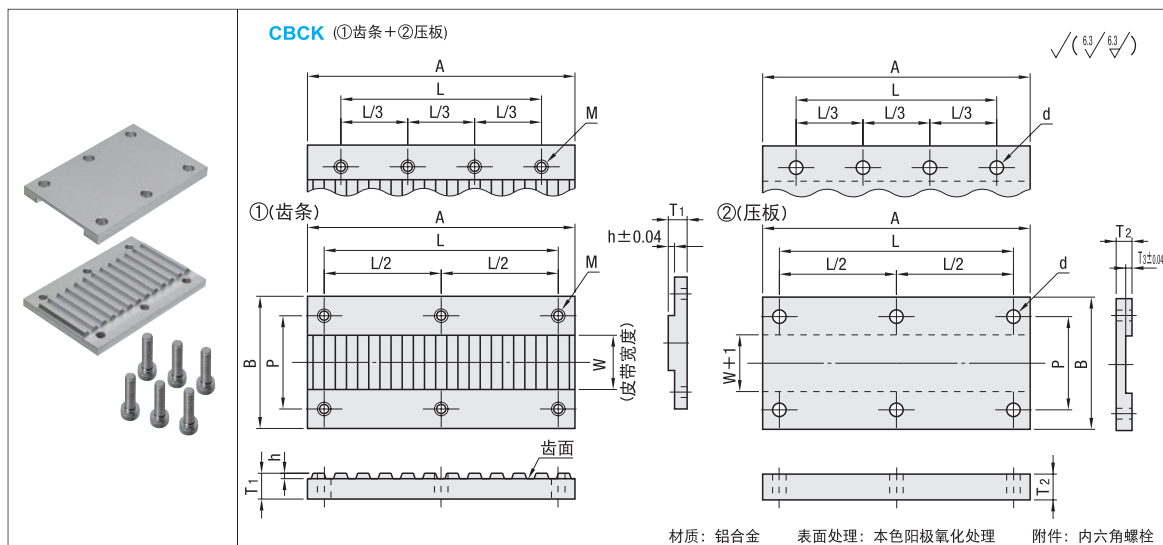

① 代码	② 皮带种类	③ 皮带公称宽度	W	A	B	T ₁	T ₂	T ₃	h	L	P	M	d	附属螺栓	安装孔数
CBCK (①+②)	XL	025	6.4	66	24	6	4.5	2.10	1.30	56	13	M4	4.5	M4-10	6
		037	9.5		26						16				
		050	12.7		30						20				
	L	050	12.7	124	32	8	5.5	3.33	2.05	111	21	M5	5.5	M5-12	8
		075	19.1		38						27				
		100	25.4		46						34				
	H	075	19.1	165	38	10	6.5	4.15	2.55	147	27	M5	5.5	M5-14	8
		100	25.4		46						34				
		150	38.1		58						46				
	S3M	200	50.8	104	70	8	6.5	4.72	3.00	84	59	M5	5.5	M5-12	8
		060	6		18						11				
		100	10		26						17				
	S5M	150	15	65	32	6	5.5	3.14	2.00	51	22	M4	4.5	M4-10	6
		250	25		42						32				
		150	15		34	8	6.5	4.72	3.00	84	23	M5	5.5	M5-12	8
	S8M	250	25	104	44						33				
		300	30		50						38				
		400	40		60						48				
	MA3	070	7	39	20	4	3.5	1.8	1.1	31	13	M3	3.4	M3-6	6
		100	10		24						16				
		150	15		29						21				
	MA5	100	10	65	26	6	5.5	2.9	1.7	51	17	M4	4.5	M4-10	6
		150	15		32						22				
		250	25		37	8	6.5	4.3	2.8	84	32	M5	5.5	M5-12	8
	MA8	150	15	104	34						23				
		200	20		39						28				
		250	25		45						33				
	T5	400	40	65	60	6	4.5	2.20	1.40	51	48	M4	4.5	M4-10	6
		100	10		26						17				
		150	15		32						22				
	T10	200	20	130	38	8	6.5	4.30	2.70	111	27	M5	5.5	M5-12	8
		250	25		43						32				
		150	15		34						23				
	AT5	200	20	65	40	6	4.5	2.20	1.40	51	28	M4	4.5	M4-10	6
		250	25		44						33				
		300	30		50	8	6.5	4.30	2.70	111	38	M5	5.5	M5-12	8
	AT10	400	40	130	60						48				
		500	50		70						58				
		150	15		32						22				
		200	20		40						28				
		250	25		44						33				

