

定位销 大头平头型 ▶ 定位销/夹具衬套



定位销
夹具衬套

20

选型示范

型号(1 代码·2 D) — (3 P) — (4 L) — (5 B)
DAFDC8 — P10.00 — L10 — B5.0
DACFDC12 — P15.97 — L12 — B3.5

■ 请按步骤 1~5 选择型号和参数后进行订购。

交货期

型号区分: 7 天发货
代码




代码		材质	表面处理	硬度
D尺寸m6	D尺寸p6			
DAFDC	DAFDCP	SKS3	—	淬火硬度60~63HRC
DAGFDC	DAGFDCP	SKS3	镀硬铬 厚度3μm以上	淬火硬度50~55HRC 镀层硬度 750HV~
DACFDC	DACFDCP	SUS440C	—	淬火硬度50~55HRC
DASFDC	DASFDCP	SUS304	—	—

■ D尺寸公差表

D	m6	p6
2	+0.008	+0.012
3	+0.002	+0.006
4	+0.012	+0.020
5	+0.004	+0.012
6		
8	+0.015	+0.024
10	+0.006	+0.015
12		
13	+0.018	+0.029
16	+0.007	+0.018
20	+0.021	+0.035
	+0.008	+0.022

■ P尺寸公差表

P	h6
2.50~ 3.00	0 -0.006
3.01~ 6.00	0 -0.008
6.01~10.00	0 -0.009
10.01~18.00	0 -0.011
18.01~30.00	0 -0.013

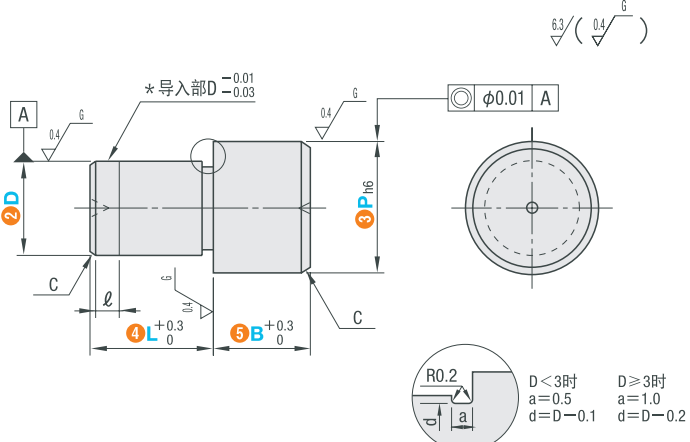

型号		③P	④L	⑤B	ℓ	C	
① 代 码	②D	最小单位0.01mm	最小单位1mm	最小单位0.1mm			
<m6> DAFDC DAGFDC DACFDC DASFDC	<p6> DAFDPC DAGFDPC DACFDPC DASFDPC	1	1.50~3.00	2・3	2.0~5.0	0	0.1
		2	2.50~6.00	2~6	2.0~15.0	0	0.5
		3	3.50~8.00	3~10	2.0~15.0	1	1
		4	4.50~8.00	3~14	2.0~15.0	1	1
		5	5.50~10.00	5~15	2.0~15.0	1	1
		6	6.50~10.00	5~15	2.0~30.0	1	1
		8	8.50~15.00	5~16	2.0~30.0	2	1.5
		10	11.00~17.00	5~20	3.0~30.0	2	2
		12	13.00~18.00	6~24	3.0~30.0	2	2
		13	14.00~20.00	7~26	5.0~30.0	2	2
		16	17.00~27.00	8~32	5.0~30.0	2	3
		20	22.00~30.00	10~40	5.0~30.0	2	3



邮箱: Service@srdfaa.com



传真: 0755-8957-5523

SRD仕瑞达