

内六角螺栓

防松定型

螺丝/螺帽



螺丝
螺帽

29



型号 (1 代码 · 2 M) — (3 L)
EBL5 10

■ 请按步骤 1 ~ 3 选择型号和参数后进行订购。



型号区分: 5 天发货
代码

■ 内六角螺栓 — 防松定型 —



代码	材质	表面处理	硬度	强度分类
EBL	SCM435	发黑	38~43HRC	12.9
EBSUSL	SUS304	—	—	A2-70

M×P	A	E	B
4×0.7	7	4	3
5×0.8	8.5	5	4
6×1.0	10	6	5
8×1.25	13	8	6
10×1.5	16	10	8
12×1.75	18	12	10

※强度分类是指螺栓的抗拉强度。

(例)12.9


表示屈服点或耐力的最小值为抗拉强度的90%。
表示抗拉强度的最小值为1220N/mm²。

(例)A2-70

表示抗拉强度的最小值为700N/mm²。

钢分类为A2(奥氏体不锈钢)

防松动处理

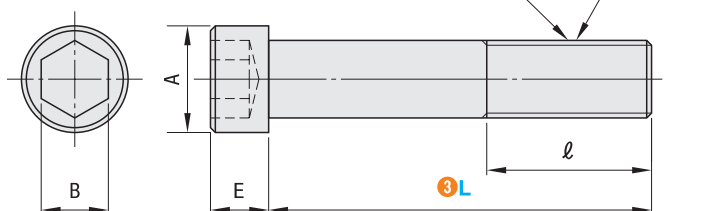

■ 铁

型号	ℓ
1 代码 2 M-3 L	
4-8	全螺纹
10	
12	
15	
20	
25	
30	
20	20
25	
30	
35	
40	
45	
50	
5-10	全螺纹
12	
15	
20	
25	
30	
35	
22	22
25	
30	
35	
40	
45	
50	
6-10	全螺纹
15	
20	
25	
30	
35	
40	
45	24
50	

型号	ℓ
1 代码 2 M-3 L	
8-15	全螺纹
20	
25	
30	
35	
40	
45	28
50	
55	
60	
10-20	
25	全螺纹
30	
35	
40	
45	
50	
55	32
60	
12-25	全螺纹
30	
35	
40	
45	
50	
55	36
60	

■ 不锈钢

型号	ℓ
1 代码 2 M-3 L	
4-8	全螺纹
10	
12	
15	
20	
25	
30	全螺纹
35	
40	
45	
50	
55	
60	
5-10	全螺纹
12	
15	
20	
25	
30	
35	
22	22
25	
30	
35	
40	
45	
50	
6-15	全螺纹
20	
25	
30	
35	
40	
45	24
50	
8-15	全螺纹
20	
25	
30	
35	
40	
45	28
50	
55	28
60	



邮箱: Service@srdfaa.com



传真: 0755-8957-5523

SRD仕瑞达