



(T尺寸固定型)
(T尺寸指定型)

型号 (1) 代码 · (2) B (3) T

DBSSTE17
DBSTFN19

— 19.5

■ 请按步骤 ①~③ 选择型号和参数后进行订购。




型号区分:

代码 7 天发货

■ 螺纹型

T尺寸	代码	材质	硬度	表面处理
固定型	DBSTEN	SCM435	46~50HRC	无电解镀镍
	DBSSTE	SUS440C	50~55HRC	—
指定型	DBSTFN	SCM435	32~38HRC	无电解镀镍
	DBSSTF	SUS440C	40~45HRC	—

$6.3 / (\nabla / \nabla / \nabla) \begin{matrix} 0.8 \\ 0.8 \\ 0.8 \end{matrix} \begin{matrix} G \\ G \\ G \end{matrix}$

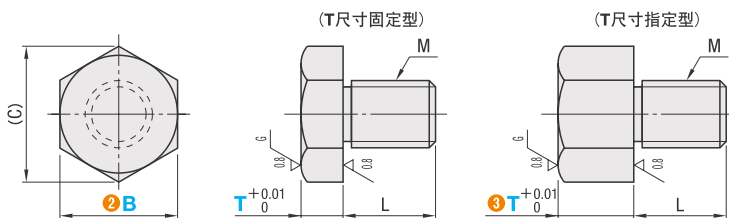

■ T尺寸固定型

型号	① 代码	② B	T	M (粗牙螺纹)	L	(C)
DBSTEN (35CrMo) DBSSTE (9Cr18)		5.5A	3	3	5	6.4
		5.5	5	4	6	8.1
		7		5		9.2
		8	6	8	10	11.5
		10				
		10B	8	10	12	15
		13				
		13A	8	10	12	16.2
		13B				
		14	5	10	12	19.6
		14A				
		14B	8	10	12	21.9
		17				
		17A	8	10	12	19.6
		17B				
		19	5	10	12	21.9
		19A				
		19B	8	12	15	18

■ T尺寸指定型

型号	① 代码	② B	③ T 单位0.5mm	M (粗牙螺纹)	L	(C)	
DBSTFN (SCM435)		5.5	2.0~10.0	3	5	6.4	
		7		4	8.1		
		8		5	9.2		
	DBSSTF (SUS440C)		10	5.0~30.0	6	6	11.5
			13		8	10	15
			14	10.0~50.0	10	12	16.2
		17	10		12	19.6	
		19	12		15	21.9	



型号

DBSTM16




型号区分:

代码 7 天发货

■ 压入型

代码	材质	硬度	表面处理
DBSTM	S45C	46~50HRC	无电解镀镍
DBSSTM	SUS440C	50~55HRC	—



型号	代码	D	d _{m6}	L	T
DBSTM (S45C)	5	3	+0.008 +0.002	5	5
	5A			7	3
	5B			5	3
DBSTM (S45C)	6	4	+0.012 +0.004	6	5
	6A			9	3
	6B			6	3
	8			8	5
	8A			12	3
DBSSTM (SUS440C)	8B	5	+0.015 +0.006	8	3
	10			8	3
	10A			12	5
DBSSTM (SUS440C)	10B	6	+0.015 +0.006	8	3
	12			10	5
	12A			15	5
	16			10	5
	16A			15	5
	18			12	5
	18A			18	5
	20			10	5
	20A			16	5
	20A			24	5



邮箱: Service@srdfaa.com



传真: 0755-8957-5523

SRO仕瑞达