



转轴

一端台阶型 D公差 h9/h7/g6



型号(①代码·②D) — ③L — ④F — ⑤P
BCSRHP25 — 250 — F30 — P10

■ 请按步骤①~⑤选择型号和参数后进行订购。



型号区分: ⑦ 天发货

转轴

11




代码	公差		材质	表面处理
	D	P		
①	h9	h7	S45C	发黑
			SUS304	无电解镀锌
			SUS304	—
②	h9	g6	S45C	发黑
			SUS304	—
			SUS304	—
③	h7	h7	S45C	发黑
			SUS304	无电解镀锌
			SUS304	—
④	g6	g6	S45C	发黑
			SUS304	无电解镀锌
			SCM435	—
			硬度30~35HRC	发黑

■ 公差表

D · P	h9	h7	g6
3	0	0	-0.002
	-0.025	-0.010	-0.008
3.1~6	0	0	-0.004
	-0.030	-0.012	-0.012
6.1~10	0	0	-0.005
	-0.036	-0.015	-0.014
10.1~18	0	0	-0.006
	-0.043	-0.018	-0.017
18.1~30	0	0	-0.007
	-0.052	-0.021	-0.020
30.1~50	0	0	-0.009
	-0.062	-0.025	-0.025

① D部表面粗糙度h9为 $\frac{6.3}{\sqrt{R}}$, h7、g6为 $\frac{1.6}{\sqrt{R}}$ 。

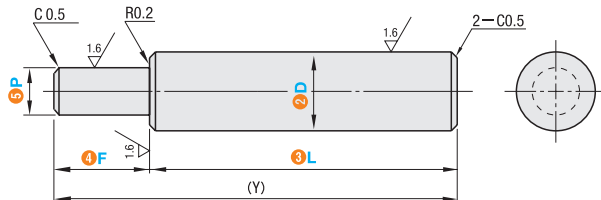

① D部公差h9/P部公差h7 ② D部公差h9/P部公差g6型

型号	②D	③L	④F	⑤P	(Y) max.
① 代码					
① D部h9 · P部h7	6	15.0~398.0	2 ≤ F ≤ P × 5	3 4 5	400
BCSRMHP	8	15.0~498.0		3 ≤ P < D	500
BCPSRMHP	10	15.0~598.0		5 ≤ P < D	600
BCSSRMHP	12	15.0~698.0		10 ≤ P < D	700
② D部h9 · P部g6	15	15.0~798.0		16 ≤ P < D	800
BCSRMGP	20	30.0~998.0			1000
BCPSRMGP	25	30.0~998.0			
BCSSRMGP	30	30.0~998.0			
(BCSSRMHP · BCSSRMGP不可选择D6)	35	40.0~998.0			

③ h7型

型号	②D	③L	④F	⑤P	(Y) max.
① 代码					
BCSRHP BCPSRHP BCSSRHP	6	15.0~398.0	2 ≤ F ≤ P × 5	3 4 5	400
	8	15.0~498.0		3 ≤ P < D	500
	10	15.0~598.0		5 ≤ P < D	600
	12	15.0~698.0		10 ≤ P < D	700
	15	15.0~798.0		16 ≤ P < D	800
	17	30.0~898.0			900
	20	30.0~998.0			
	25	30.0~998.0			
	30	30.0~998.0			
	35	40.0~998.0			
	40	40.0~998.0			
	50	40.0~998.0			

④ g6型

型号	②D	③L	④F	⑤P	(Y) max.
① 代码					
BCSRP BCPSRP BCSSRP (BCSSRP不可选择D13 · 16 · 18 · 22) * BCHRP (仅带 * 符号的尺寸)	6	15.0~398.0	2 ≤ F ≤ P × 5	3 4 5	400
	8	15.0~498.0		3 ≤ P < D	500
	10	15.0~598.0		5 ≤ P < D	600
	12	15.0~698.0		10 ≤ P < D	700
	13	15.0~698.0		16 ≤ P < D	800
	* 15	15.0~798.0			900
	16	15.0~898.0			
	17	30.0~898.0			
	18	30.0~898.0			
	* 20	30.0~998.0			
	22	30.0~998.0			
	* 25	30.0~998.0			
	* 30	30.0~998.0			
	* 35	40.0~998.0			
	* 40	40.0~998.0			
* 50	40.0~798.0				

询价④种方式



官网 <http://www.srdfaa.com>
深圳市仕瑞达自动化设备有限公司



全国免费 400-966-3863
客服热线 0755-27926613