



定位销 小头锥角型



选型示范

型号(1 代码·2 D)	3 P
DASB5	2
DAGJSB6	3



交货期



型号区分: **7** 天发货



代 码				材 质	表 面 处 理	硬 度
圆 型		多 棱 型				
D尺寸m6	D尺寸p6	D尺寸m6	D尺寸p6			
DAJSB	DAJSPB	DAJDS	DAJDPS	SKS3	—	淬火硬度60～63HRC
DAGJSB	DAGJSPB	DAGJDS	DAGJDPS	SKS3	镀铬层 厚度3μm以上	淬火硬度50～55HRC 镀层硬度 750HV～
DACJSB	DACJSPB	DACJDS	DACJDPS	SUS440C	—	淬火硬度50～55HRC
DASJSB	DASJSPB	DASJDS	DASJDPS	SUS304	—	—

■D尺寸公差

D	m6	p6
2	+0.008	+0.012
3	+0.002	+0.006
4		
5	+0.012	+0.020
6	+0.004	+0.012
8		
10	+0.015	+0.024
12	+0.006	+0.015
13	+0.018	+0.029
16	+0.007	+0.018
20	+0.021	+0.035
	+0.008	+0.022

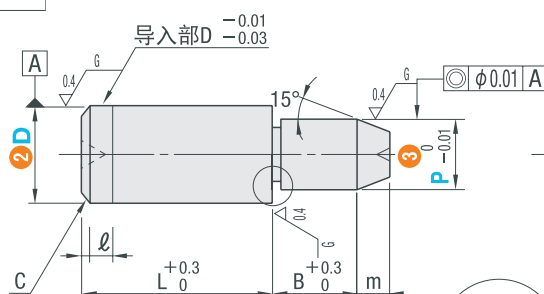

$P < 3$ 时	$P \geq 3$ 时
$a = 0.5$	$a = 1.0$
$d = P - 0.1$	$d = P - 0.2$

型号			P尺寸														L	B	m	ℓ	C	(W)											
① 代码		②D																															
<圆型>	<m6>	<p6>	2	1	2											4	2	0.5	0	0.3	—												
	DAJSB	DAJSPB	3	1	2	3											5	3	0.5	1	0.5	—											
	DAGJSB	DAGJSPB	4		2	3	4											5	3	1	1	1	1										
	DACJSB	DACJSPB	5		2	3	4	5											10	5	2	1	1	1.2									
	DASJSB	DASJSPB	6		2	3	4	5	6											10	5	2	1	1	1.5								
			8			3	4	5	6	8											15	6	3	2	1.5	1.8							
			10			3	4	5	6	8	10											15	8	3	2	2	2.2						
<多棱型>	DAJDS	DAJDPS	12				5	6	8	10	12											15	8	3	2	2	2.5						
	DAGJDS	DAGJDPS	13					6	8	10	12	13											22	8	4	2	2	3					
	DACJDS	DACJDPS	16								10	12	13	14	15	16											22	10	4	2	3	4	
	DASJDS	DASJDPS	20											13	14	15	16	20											30	10	4	2	3

①适用于D≥4

① DAGJSB、DAGJSPB适用于 $D \geq 4$ 。

询价④种方式

官网 <http://www.srdfaa.com>
深圳市仕瑞达自动化设备有限公司

全国免费 400-966-3863
客服热线 0755-27926613