



# 歧管块

## 液·水压用/气压用终端集成块 L字型



型号 (1) 代码 · (2) 连续孔数 — (3) No.  
FCLSN3 — 11


■ 请按步骤 1~3 选择型号和参数后进行订购。



型号区分: 代码 7 天发货



代码	材质	表面处理	最高使用压力
FCLSN	S45C	镀锌	20.6MPa≈210kgf/cm <sup>2</sup> 以下
FCLSNR	SUS304	—	—
FCLAN	铝合金	—	1MPa≈10kgf/cm <sup>2</sup> 以下

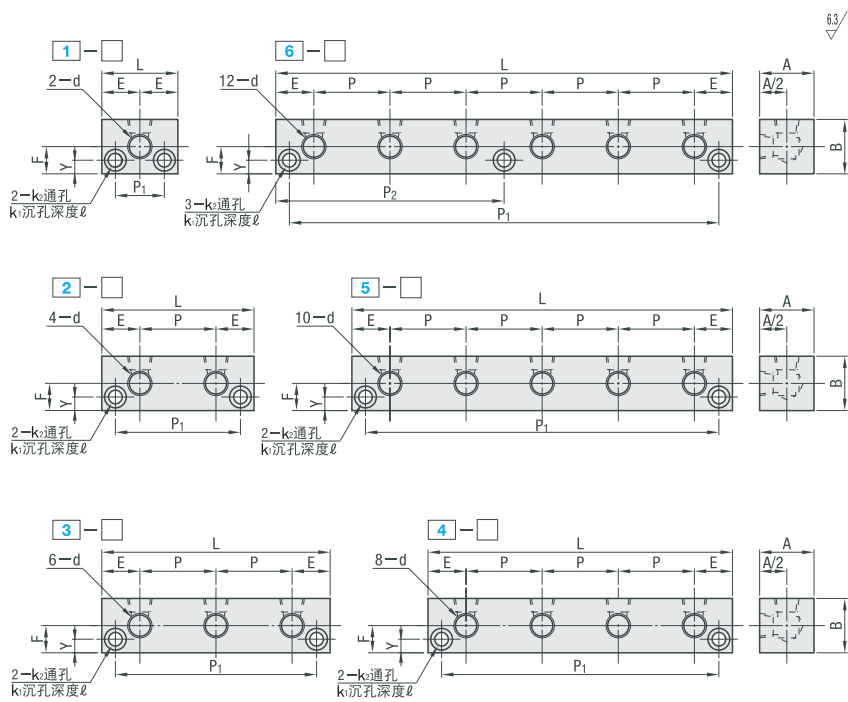

型号		③ No.	d Rc(PT)	A	B	L	P	P <sub>1</sub>	P <sub>2</sub>	E	F	Y	k <sub>1</sub>	k <sub>2</sub>	ℓ
① 代码	② 连续孔数														
FCLSN (液压用)	1	11	1/8	30	30	40	—	25	—	20	15	7	11	6.6	6.5
		22	1/4								15				
	2	11	1/8	30	30	75	35	60	—	20	15	7	11	6.6	6.5
		22	1/4								20				
	3	11	1/8	30	30	110	35	95	—	20	15	7	11	6.6	6.5
		22	1/4								20				
	4	11	1/8	30	30	145	35	130	—	20	15	7	11	6.6	6.5
		22	1/4								20				
	5	11	1/8	30	30	180	35	165	—	20	15	7	11	6.6	6.5
		22	1/4								20				
	6	11	1/8	30	30	215	35	200	107.5	20	15	7	11	6.6	6.5
		22	1/4								20				
		33N	3/8	40	40					20					

型号		③ No.	d Rc(PT)	A	B	L	P	P <sub>1</sub>	P <sub>2</sub>	E	F	Y	k <sub>1</sub>	k <sub>2</sub>	ℓ
① 代码	② 连续孔数														
FCLAN (气压用)	1	11	1/8	25	25	40	—	25	—	20	12.5	7	9.5	5.5	5.5
		22N	1/4								17.5				
	2	11	1/8	25	25	65	25	50	—	20	12.5	7	9.5	5.5	5.5
		22N	1/4								17.5				
	3	11	1/8	25	25	90	25	75	—	20	12.5	7	9.5	5.5	5.5
		22N	1/4								17.5				
	4	11	1/8	25	25	115	25	100	—	20	12.5	7	9.5	5.5	5.5
		22N	1/4								17.5				
	5	11	1/8	25	25	140	25	125	—	20	12.5	7	9.5	5.5	5.5
		22N	1/4								17.5				
	6	11	1/8	25	25	165	25	150	82.5	20	12.5	7	9.5	5.5	5.5
		22N	1/4								17.5				

歧管块

询价④种方式



官网 <http://www.srdfaa.com>  
深圳市仕瑞达自动化设备有限公司



全国免费 400-966-3863  
客服热线 0755-27926613