



直线轴承/滚珠导向组件

直柱型直线轴承 开口型





型号(1代码·2d)
ADOP20

■ 请按步骤1~2选择型号和参数后进行订购。



型号区分:
代码 5 天发货

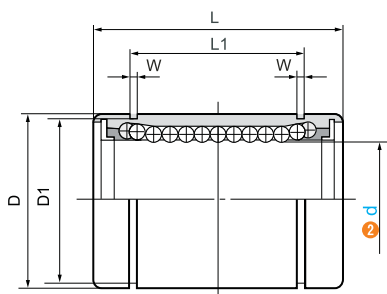

型号			D		L		L1		W	D1	K1	A°	偏心	最大间隙	钢珠列数	参考重量
1 代码	2 d	公差		公差		公差		公差								
ADOP	12	0	21	0	30	0	23	0	1.3	20	8	80	0.012	-0.005	3	25
	13	-0.009	23	-0.013	32	-0.2	23	-0.2	1.3	22	9			-0.007	4	34
	16		28		37		26.5		1.6	27	11					52
	20		32		42		30.5		1.6	30.5	11	60				69
	25	0	40	0	59		41		1.85	38	12		0.015	-0.009		188
	30	-0.010	45	-0.016	64		44.5		1.85	43	15					210
	35		52		70		49.5		2.1	49	17					335
	40	0	60	0	80	-0.3	60.5	-0.3	2.1	57	20	50	0.020	-0.013	5	500
	50	-0.012	80	-0.019	100		74		2.6	76.5	25					1340
	60		90		110		85		3.15	86.5	30		0.025	-0.016		1610

2 d	基本额定负载	
	C (动) N	Co (静) N
12	510	784
13	510	784
16	774	1180
20	882	1370
25	980	1570
30	1570	2740
35	1670	3140
40	2160	4020
50	3820	7940

国际单位 1N = 0.102kgf

