

# 定位销 大头平头型

内螺纹型/P尺寸固定型

# 定位销/夹具衬套



型号 (1 代码 · 2 D) — (3 P)  
DAJDTA10 — 14

■ 请按步骤 1~3 选择型号和参数后进行订购。



型号区分: 7 天发货  
代码



代码	材质	表面处理	硬度
DAJDTA	SKS3	—	淬火硬度60~63HRC
DAGJDTA	SKS3	镀硬铬 镀层厚度3 μm以上	淬火硬度50~55HRC 镀层硬度 750HV
DACJDTA	SUS440C	—	淬火硬度50~55HRC
DASJDTA	SUS304	—	—

### ■ D尺寸公差




D	g6
6	-0.004 -0.012
8	-0.005 -0.014
10	-0.006 -0.017
12	-0.007 -0.020
13	-0.006 -0.017
16	-0.007 -0.020
20	-0.007 -0.020

### ■ P尺寸公差表

P	h6
8	0
10	-0.009
12	0
14	-0.011
16	-0.011
18	-0.011
25	0
30	-0.013

### ■ 内螺纹底孔表

螺纹直径	M3	M5	M8
底孔直径d <sub>2</sub>	2.6	4.3	6.9
底孔深度U	9.5	14.5	21

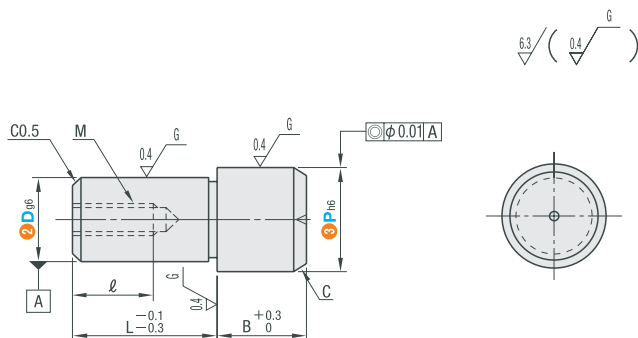

1 代码	型号		3 P选择	L	B	M (粗牙螺纹)	l	C
	2 D							
DAJDTA DAGJDTA DACJDTA DASJDTA	6	8 · 10	10	5	M3	5	1.0	
	8	12	12	6	M5	8	1.5	
	10	12 · 14	16	10	M5	8	2.0	
	12	16	20	20	M5	8	2.0	
	13	18	22	22	M8	12	3.0	
	16	25	24	25	M8	12	3.0	
	20	30	32	30	M8	12	3.0	

定位销  
夹具衬套

20



邮箱: Service@srdfaa.com



传真: 0755-8957-5523

SRD 仕瑞达