




导向轴支座

T型开口 标准型

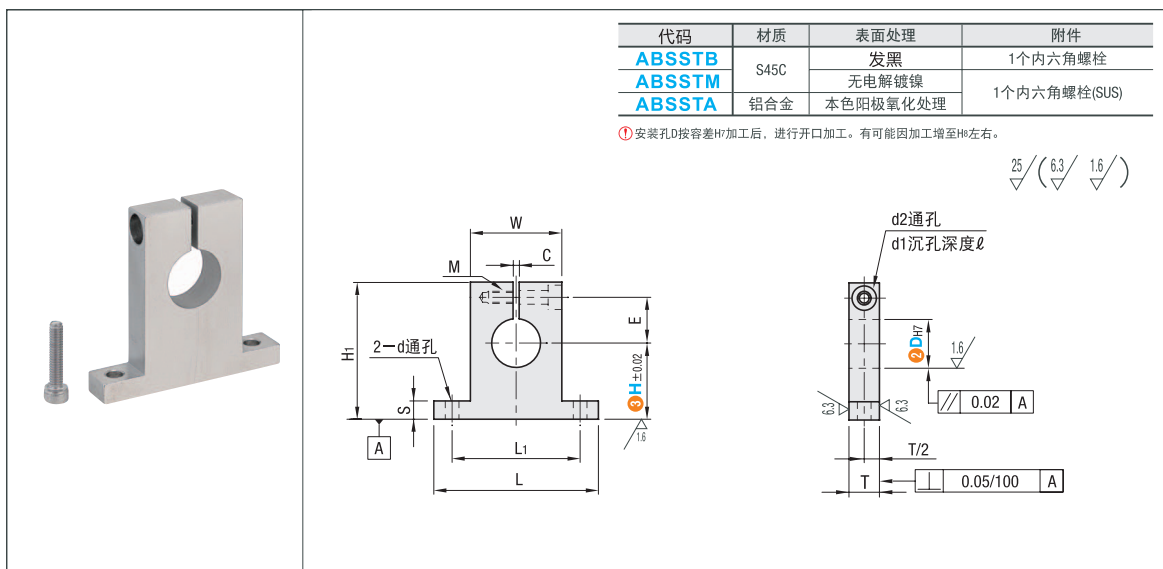

1 代码 2 D 3 H
ABSSTM8 - 25

■ 请按步骤①~③选择型号和参数后进行订购。

型号区分: 7 天发货

型号		高度选择				L	H ₁	T	S	W	L ₁	d	E	d ₂	d ₁	ℓ	C	坚固螺栓 M				
① 代码	② D	③ H																				
ABSSTB ABSSTM ABSSTA	3	10	15	20		26	H+11	8	4	10	18	3.5	7	3.5	6.5	3.5	1.5	M3通孔				
	4	10	15	20		26	H+11	8	4	10	18	3.5	7	3.5	6.5	3.5	1.5					
	5	10	15	20	25	26	H+12	8	4	10	18	3.5	8	3.5	6.5	3.5	1.5					
	6	10	15	20	25	26	H+12	8	4	10	18	3.5	8	3.5	6.5	3.5	1.5					
	8	10	15	20	25	30	40	42	H+16	10	6	18	30	4.5	11	4.5	8	4.5	2	M4通孔		
	10	10	15	20	25	30	42	H+16	10	6	18	30	4.5	11	4.5	8	4.5	2				
	12	10	15	20	25	30	42	H+18	10	6	18	30	4.5	13	4.5	8	4.5	2				
	13		15	20	25	30	42	H+18	10	6	18	30	4.5	13	4.5	8	4.5	2				
	15		15	20	25	30	54	H+20	10	6	30	42	4.5	15	4.5	8	4.5	2	M4深度8			
	16		15	20	25	30	40	54	H+20	10	6	30	42	4.5	15	4.5	8	4.5		2		
	18		20	25	30	40	50	60	67	H+26	16	8	35	50	6.6	18	6.6	11		6.5	2	
	20		20	25	30	40	50	60	67	H+26	16	8	35	50	6.6	18	6.6	11	6.5	2	M6通孔	
	25		20	25	30	40	50	60	67	H+28	16	8	35	50	6.6	21	6.6	11	6.5	2		
	30			25	30	40	50	60	85	H+33	20	10	45	65	9	24	9	14	9	3	M8深度16	
	35			25	30	40	50	60	85	H+36	20	10	45	65	9	27	9	14	9	3		
	40				30	40	50	60	80	100	H+38	20	10	60	80	9	29	9	14	9		3
	50					40	50	60	80	125	H+51	25	15	75	100	14	38	14	20	13		3

询价④种方式



官网 <http://www.srdfaa.com>
深圳市仕瑞达自动化设备有限公司



全国免费 400-966-3863
客服热线 0755-27926613