



直线导轨

高组装超重载直线导轨 标准滑块型·滑块加宽型



型号(①代码·②H) — ③L
AGHLH30 — 880
AGHLW30 880


■请按步骤①~③选择型号和参数后进行订购。




型号区分: ④代码 7 天发货




耐热温度: -20~80℃



标准滑块型



滑块加宽型

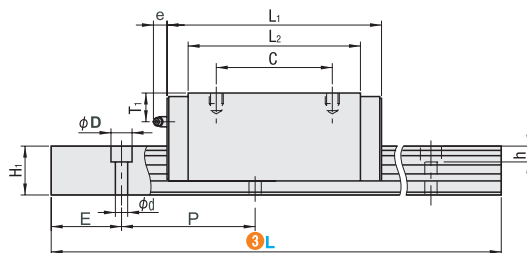


	型号		②H	③L	滑块尺寸											导轨尺寸					
	①代码				W	L1	B	C	S×φ	L2	K	T	油嘴			H1	W1	W2	沉孔	P	E
标准滑块型	AGHLH	AGHL2H	30	100~1960	44	92.2	32	50	M5×6	65.2	25.4	8	安装孔	e	T1	17.5	20	12	6×9.5×8.5	60	最小单位1mm。(E尺寸为两端均分)
			40	100~1960	48	104.6	35	50	M6×8	78.6	34.5	8				22	23	12.5	7×11×9	60	
			45	200~1960	60	120.4	40	60	M8×10	93	39	8.5				9.5	26	16	9×14×12	80	
滑块加宽型	AGHLW	AGHL2W	30	100~1960	63	92.2	53	40	M6×10	65.2	25.4	10	M6×1	12	6	17	20	21.5	6×9.5×8.5	60	
			36	100~1960	70	104.6	57	45	M8×12	78.6	30.5	14				6	22	23.5	7×11×9	60	
			42	200~1960	90	120.4	72	52	M10×15	93	36	16				6.5	26	31	9×14×12	80	

国际单位1N=0.102kgf

H	基本额定负载		静态容许力矩			重量		
	C (动) kN	Co kN	MA N·m	MB N·m	MC N·m	滑块kg 标准型	滑块kg 加宽型	导轨 kg/m
30	11	23.2	251	257	261	0.39	0.51	2.23
36 40	13.5	70.7	378	379	387	0.72	0.79	3.15
42 45	20.8	45.2	650	653	670	1.15	1.78	4.52



■预压与精度基准



普通间隙型

径向间隙 (μm)	
H24 H28	-4~+4
H30	-5~+5
H36 H40	-6~+6
H42 H45	-7~+7

尺寸精度 (μm)	
高度H的尺寸公差	±10
宽度W2的尺寸公差	±10
成对高度H公差	±20
成对高度W2公差	±20

