



直线导轨

高组装重载直线导轨 标准滑块型·滑块加宽型



带键槽
带键槽

型号(1)代码(2)H) — (3)L
AGHH28
AGHW24


— 880
880

■ 请按步骤①~③选择型号和参数后进行订购。




型号区分:


代码 7 天发货

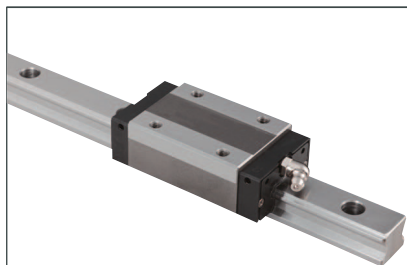


	代码		材质 硬度
	单滑块	双滑块	
块型 标准滑	AGHH	AGH2H	碳素钢 58~62HRC
宽滑 型块加	AGHW	AGH2W	



标准滑块型



滑块加宽型

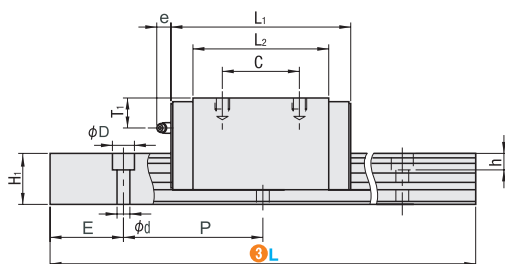


	型号		③L	滑块尺寸												导轨尺寸						
	①代码			2H	W	L ₁	B	C	S×ℓ	L ₂	K	T	油嘴			H ₁	W ₁	W ₂	沉孔	P	E	
	单滑块	双滑块											安装孔	e	T ₁				d×D×h			
标准滑块型	AGHH	AGH2H	28	100~1960	34	61.4	26	26	M4×5	39.4	23.7	6	M4×0.7	5.3	7.95	15	15	9.5	4.5×7.5×6	60	最小单位1mm (E尺寸为两端均分)	
			30	100~1960	44	77.5	32	36	M5×6	50.5	25.4	8	M6×1	12	6	17.5	20	12	6×9.5×8.5	60		
			40	100~1960	48	84	35	35	M6×8	58	34.5	8	M6×1	12	10	22	23	12.5	7×11×9	60		
			45	200~1960	60	97.4	40	40	M8×10	70	39	8.5	M6×1	12	9.5	26	28	16	9×14×12	80		
滑块加宽型	AGHW	AGH2W	24	100~1960	47	55.9	38	30	M5×8	39.4	19.7	8.9	M4×0.7	5.3	3.95	15	15	16	4.5×7.5×6	60		
			30	100~1960	63	74	53	40	M6×10	50.5	25.4	10	M6×1	12	6	17.5	20	21.5	6×9.5×8.5	60		
			36	100~1960	70	80	57	45	M8×12	58	30.5	14	M6×1	12	6	22	23	23.5	7×11×9	60		
			42	200~1960	90	95.3	72	52	M10×15	70	36	16	M6×1	12	6.5	26	28	31	9×14×12	80		


容许负载

国际单位1N=0.102kgf

H	基本额定负载		静态容许力矩			重量		
	C(动) kN	C0 kN	MA N·m	MB N·m	MC N·m	滑块kg 标准型	滑块kg 加宽型	导轨 kg/m
24 28	5.1	10.2	54.2	54.2	79.9	0.20	0.20	1.32
30	8.6	16.8	117.3	117.3	178.6	0.29	0.40	2.28
36 40	11.0	20.8	158.3	158.3	254.0	0.55	0.62	3.17
42 45	16.0	29.4	263.4	263.4	432.5	0.85	1.42	4.54



预压与精度基准



普通间隙型

径向间隙(μm)	
H24 H28	-4~+4
H30	-5~+5
H36 H40	-6~+6
H42 H45	-7~+7

尺寸精度(μm)	
高度H的尺寸公差	±10
宽度W2的尺寸公差	±10
成对高度H公差	±20
成对高度W2公差	±20

