




轴承、轴承座组件

不锈钢带法兰滚珠轴承（小径·深沟） 双盖式

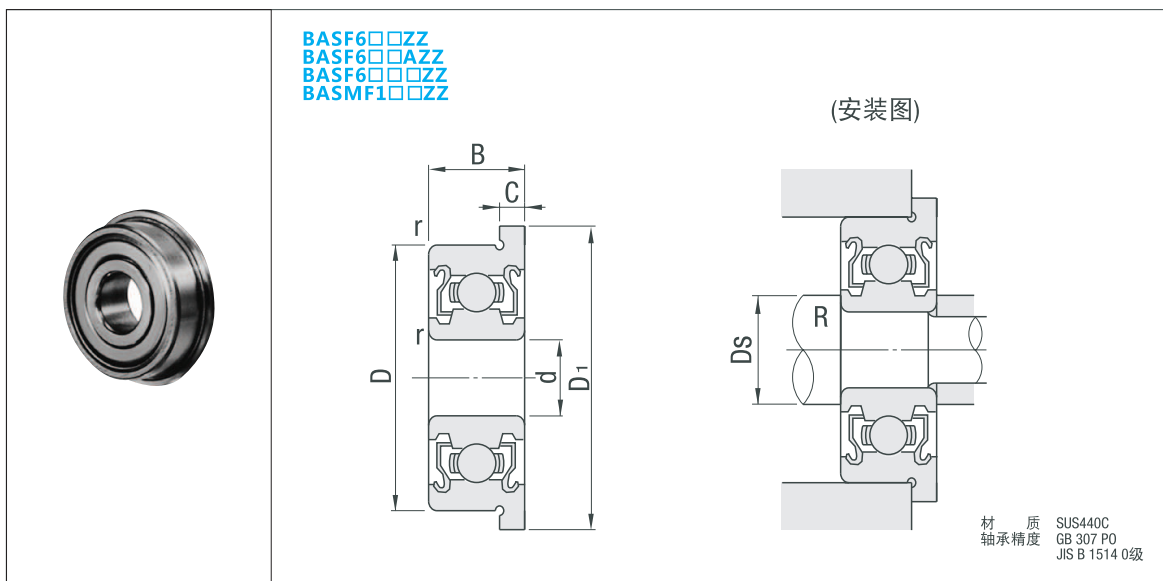

BASF6□□ZZ
BASF6□□AZZ
BASF6□□QZZ
BASMFI□□ZZ

(安装图)

材 质 SUS440C
轴承精度 GB 307 P0
JIS B 1514 0级



型号
BASF6901ZZ



型号区分：
交货期 5 天发货

轴承座组件

13

型号	d	D	B	D ₁	C	r (min.)	基本额定负载		容许转速 rpm (参考)	安装尺寸		重量 (g) (参考)
							Cr(动) N	Cor(静) N		Ds (min.)	R (max.)	
BASF682ZZ	2	5	2.3	6.1	0.6	0.08	143	40	85000	2.7	0.08	0.22
BASF692ZZ		6	3.0	7.5	0.8	0.15	281	79	75000	3.0	0.15	0.48
BASF682AZZ		6	2.6	7.1	0.8	0.08	178	59	71000	3.7	0.08	0.36
BASF692AZZ	2.5	7	3.5	8.5	0.9	0.15	328	102	63000	3.85	0.15	0.68
BASF673ZZ		6	2.5	7.2	0.6	0.1	177	59	71000	3.6	0.08	0.33
BASF683ZZ		7	3	8.1	0.8		331	104	63000	3.9	0.1	0.53
BASF693ZZ	3	8	4	9.5	0.9	0.15	474	144	60000	4.2	0.15	0.97
BASF623ZZ		10	4	11.5	0.15	536	175	50000	1.86			
BASF674ZZ		7	2.5	8.2	0.6	0.1	217	86	60000	4.6	0.08	0.35
BASF684ZZ	9		10.3	1	544		179	53000	5.0	0.1	1.14	
BASF694ZZ	4	11	4	12.5		0.15	545	182	48000	5.2	0.15	1.96
BASF604ZZ		12		13.5	1	0.2	813	276		2.53		
BASF624ZZ		13	5	15		0.08	1105	388	40000	5.6	0.2	3.53
BASF675ZZ	5	8	2.5	9.2	0.6	0.08	185	72	53000		0.08	0.41
BASF685ZZ		11	5	12.5		0.15	607	225	45000	6.2	0.15	2.18
BASF695ZZ		13	4	15	1	0.2	915	344	43000	6.6	0.2	2.84
BASF605ZZ	14		16	1105			404	40000	3.85			
BASF625ZZ	16	5	18		0.3	1469	536	36000	7.7	0.3	5.3	
BASF676ZZ	6	10	3	11.2	0.6	0.1	421	174	45000	6.6	0.1	0.77
BASF686ZZ		13	5	15	1.1	0.15	918	352	40000	7.0	0.15	3.04
BASF696ZZ		15		17	1.2	0.2	1139	418		7.6	0.2	4.26
BASF606ZZ	6	17		19		0.3	1921	668	38000			6.61
BASF626ZZ		19	6	22	1.5		1985	708	32000	8	0.3	9.09
BASF678ZZ		8	12	3.5	13.6	0.8	0.1	462	219	40000	8.8	0.1
BASF688ZZ	16		5	18	1.1	0.2	1368	568	36000	9.6	0.2	4.47
BASF698ZZ	19		6	22	1.5	0.3	1901	728		10	0.3	8.3
BASF608ZZ	22	7	25			2799	1103	34000			13	
BASF6700ZZ	10	15	4	16.5	0.8	0.15	684	348	15000	10.3	0.15	2.1
BASF6800ZZ		19	5	21	1	0.3	1459	672	37000	12	0.3	6.1
BASF6900ZZ		22	6	25	1.5		2156	1018	34000	13.2		11.1
BASF6701ZZ	12	18	4	19.5	0.8	0.2	787	424	13000	12.4	0.2	3.4
BASF6901ZZ		24	6	26.5	1.5	0.3	2453	1173	31000	14	0.3	13.2
BASF6702ZZ		21	4	22.5	0.8	0.2	796	466	11000	15.4	0.2	3.9
BASF6802ZZ	15	24	5	26	1.1	0.3	1762	1002	28000	17	0.3	8.3
BASF6902ZZ		28	7	30.5	1.5		3672	1807	26000		19.9	

■标准尺寸

型号	d	D	B	D ₁	C	r (min.)	基本额定负载		容许转速 rpm (参考)	安装尺寸		重量 (g) (参考)
							Cr(动) N	Cor(静) N		Ds (min.)	R (max.)	
BASMF104ZZ	4	10	4	11.6	0.8	0.15	604	216	50000	5.9	0.2	1.5
BASMF105ZZ	5						366	135		6	1.38	
BASMF126ZZ	6	12		13.6			234	43000	7.2	1.86		
BASMF148ZZ	8	14		15.6			308	38000	9.26	2.42		

询价④种方式



官网 <http://www.srdfaa.com>
深圳市仕瑞达自动化设备有限公司



全国免费 400-966-3863
客服热线 0755-27926613