



型号 (1) 代码 · (2) D — (3) L  
LBASO5 — 20

■ 请按步骤 ①~④ 选择型号和参数后进行订购。




型号区分: 代码 **5** 天发货



■ 可以将拉伸弹簧的挂钩勾在弹簧支柱的孔中。

直杆型 · ℓ 尺寸固定型


LBASO  
LBSASO (不锈钢)

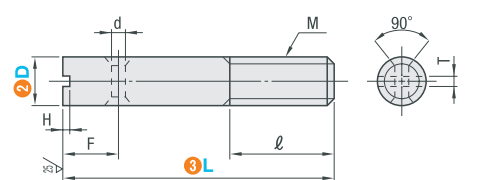

代码	材质	表面处理	附件·材质
LBASO LBAIO LBAIOZ	S45C	发黑	1个螺帽 SWCH (JIS1种)
LBASO	SUS303	-	1个螺帽 SUS304 (JIS1种)
LBSAIO LBSAIOZ	SUS304		


两平面型

LBAIO  
LBSAIO (不锈钢)

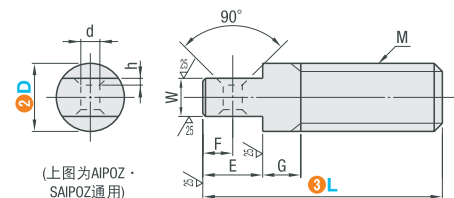

两平面 · 颈部全螺纹型

LBAIOZ  
LBSAIOZ (不锈钢)



型号		③L								M (粗牙螺纹)	ℓ*	F	H	T	d
① 代码	② D														
ℓ 尺寸固定型 LBASO LBSASO	3	*10	15	20	25	30				M3	10	3	1	1.2	1.5
	4	15	20	25	30	35				M4					
	5	*15	20	25	30	35	40				M5	5	2		
	6	*20		25	30	35	40				M6				6
8	*20		*25	30	35	40				M8	20	6	2.5	3	

■ 带 \* 符号 ℓ 尺寸表

代码	D-L	ℓ
LBASO LBSASO	3-10	5
	5-15	8
	6-20	12
	8-20	11
	8-25	16

① 关于规格表带 \* 符号的尺寸, ℓ 尺寸为右表的尺寸。

型号		③L								M (粗牙螺纹)	d	W	G	E	F	h
① 代码	② D															
两平面型 LBAIO LBSAIO	3	15	20	25	30				M3	1.5	1.5	3	3	1.5	0.2	
	4	15	20	25	30	35					M4		2.5	3.5	1.75	0.3
	5	15	20	25	30	35	40				M5		3	4	2	0.4
	6	20		25	30	35	40				M6		3.5	5	2.5	0.5
	8	20		25	30	35	40				M8		3	5	7	3.5

型号		③L								M (粗牙螺纹)	d	W	E	F	h
① 代码	② D														
颈部全螺纹型 LBAIOZ LBSAIOZ	3	10	15	20	25				M3	1.5	1.5	3	1.5	0.2	
	4	10	15	20	25	30					M4	2.5	3.5	1.75	0.3
	5	10	15	20	25	30	35				M5	3	4	2	0.4
	6	20		25	30	35				M6	3.5	5	2.5	0.5	
	8	20		25	30	35				M8	3	5	7	3.5	1



邮箱: Service@srdfaa.com



传真: 0755-8957-5523

**SRD 仕瑞达**