

定位销

偏心型

定位销/夹具衬套



定位销
夹具衬套

20



型号(1代码·2D)
DAJEA32


■请按步骤①~②选择型号和参数后进行订购。



型号区分:
代码 7 天发货



代码	材质	表面处理	硬度
DAJEA	SKS3	—	淬火硬度60~63HRC
DAGJEA	SKS3	镀铬 厚度3μm以上	淬火硬度50~55HRC 镀层硬度750HV~
DACJEA	SUS440C	—	淬火硬度50~55HRC
DASJEA	SUS304	—	—

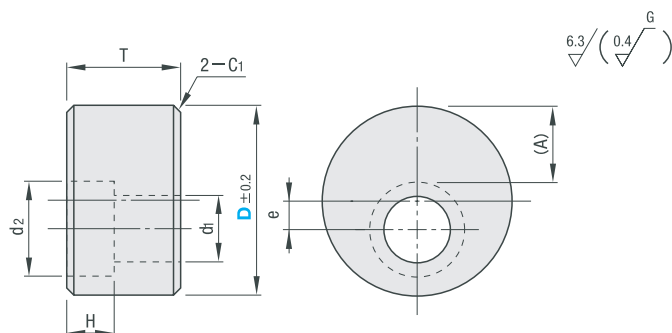

型号		d1	d2	T	H	适用螺栓	e	(A)
代码	D							
DAJEA DAGJEA DACJEA DASJEA	10	3.5	6.5	6	4	M3	1	2.75
	12	4.5	8	8	5	M4	1.2	3.2
	16	5.5	9.5	10	6	M5	2	5.25
	20	6.5	11	12	7	M6	2.5	7
	25	9	14	16	9	M8	3.5	9
	32	11	17.5	20	11	M10	5	12.25
	40	14	20	24	13	M12	7	17



型号(1代码·2D) — 3P — 4B — 5T
DASAA8

— P6.5 — B7.5 — T8.2 ■请按步骤①~⑤选择型号和参数后进行订购。




型号区分:
代码 8 天发货



■D尺寸公差

D	h7
5 · 6	0 -0.012
8 · 10	0 -0.015
12 · 16	0 -0.018
20	0 -0.021

代 码				材 质	硬 度
圆 法 兰 型		两 面 切 割 法 兰 型			
圆 型	多 棱 型	圆 型	多 棱 型		
DASAA	DASDA	DATAA	DATDA	SKS3	淬 火 硬 度 60~63HRC

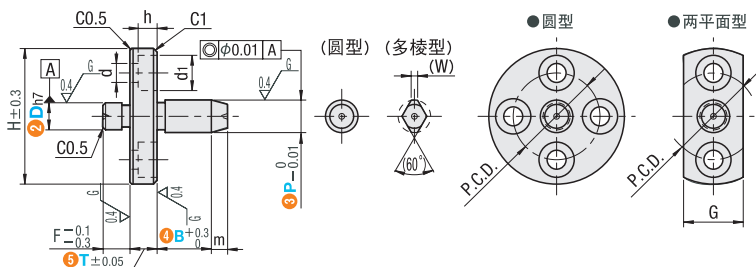

型号		3P	4B	5T	F	H	G	P.C.D.	d	d1	h	m	(W)
1代码	2D	最小单位0.01mm	最小单位0.1mm	最小单位0.1mm									
圆法兰型 ①适用于D≥8	5	3.00~6.00	3.0~10.0	5.0~10.0	5	25	—	16	3.5	6.5	3.5	3	1.5
	6	4.00~7.00	3.0~12.0	5.0~10.0	5	25	—	16	3.5	6.5	3.5	3	1.8
	8	6.00~9.00	3.0~15.0	7.0~15.0	5	36	16	24	5.5	9.5	5.5	4	2.2
	10	7.00~11.00	4.0~20.0	7.0~15.0	5	36	16	24	5.5	9.5	5.5	4	3
	12	8.00~12.00	4.0~20.0	7.0~15.0	5	36	16	24	5.5	9.5	5.5	4	3.2
<多棱型>	16	13.00~16.00	5.0~20.0	11.0~20.0	10	54	24	37	9	14	9	5	4
	20	16.00~20.00	5.0~20.0	11.0~20.0	10	54	24	37	9	14	9	5	5.5



邮箱: Service@srdfaa.com



传真: 0755-8957-5523

SRD仕瑞达