



定位销/夹具衬套

进给销 肩型直杆型



选型示范

型号(①代码·②D) — ③P — ④L — ⑤B — ⑥E
DAFPM5 — P3.50 — L5 — B6.0 — E4.0

■请按步骤①~⑥选择
型号和参数后进行订购。



交货期

型号区分:


代码

7 天发货

■标准型




代码	材质	表面处理	硬度
DAFPM	SKS3	—	淬火硬度60~63HRC
DAGFPM	SKS3	镀硬铬 厚度3 μm以上	淬火硬度50~55HRC 镀层硬度 750HV~
DACFPM	SUS440C	—	淬火硬度50~55HRC
DASFPM	SUS304	—	—

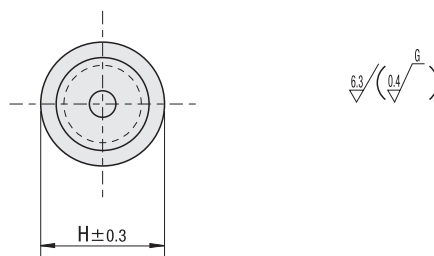

■D尺寸公差

D	D公差 m6
2	+0.008
3	+0.002
4	+0.012
5	+0.004
6	
8	+0.015
10	+0.006

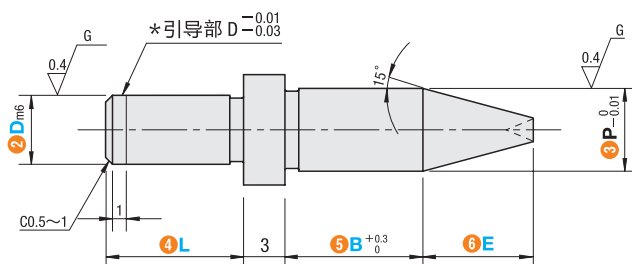

型号		③P	④L	⑤B	⑥E	H
①代码	②D	最小单位0.01mm	最小单位1mm	最小单位0.1mm	最小单位0.1mm	
DAFPM DAGFPM DACFPM DASFPM	2	2.00~ 3.00	2~ 6	2.0~10.0	0.5~10.0	5
	3	2.00~ 5.00	3~ 6	2.0~10.0	0.5~10.0	6
	4	2.00~ 5.00	4~ 8	2.0~10.0	0.5~10.0	6
	5	3.00~ 7.00	5~10	2.0~10.0	0.5~10.0	8
	6	4.00~ 7.00	6~12	2.0~12.0	0.5~10.0	8
	8	5.00~ 9.00	8~16	2.0~15.0	0.5~10.0	11
	10	6.00~11.00	10~20	2.0~20.0	0.5~10.0	13

询价④种方式



官网 <http://www.srdfaa.com>
深圳市仕瑞达自动化设备有限公司



全国免费 400-966-3863
客服热线 0755-27926613