



型号(① 代码 · ② D)
CDG15

— 3 T
— 6

■ 请按步骤①~③选择型号和参数后进行订购。



型号区分: **7** 天发货





代码		材质	表面处理	材质	附件
法兰型	圆弧型			轴承	
CDG	CDGC	S45C	发黑	钢	挡圈 (SUS304)
CDGM	CDGCM		无电解镀铬		
CDGA	CDGCA	铝合金	本色阳极氧化处理		

法兰型

圆弧形

$$\frac{6.3}{\nabla} \left(\frac{1.6}{\nabla} \right)$$

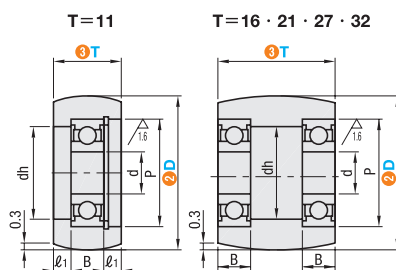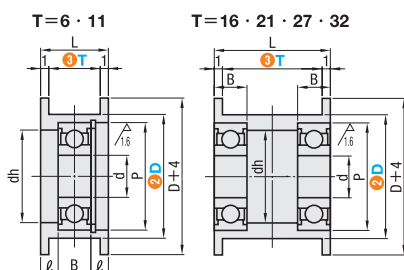

①T的公差精度为 ± 0.2 ，请确认平皮带宽度公差后选择惰轮型号。

型号		3T	P	dh	ℓ	L	使用轴承							
① 代码	2D						No.	d	B					
法兰型 CDG CDGM CDGA	15	6	11	9	2	8	694ZZ×1	4	4					
	20		16	13	1.5	8	625ZZ×1	5	5					
	20		16	13	4	13	625ZZ×1	5	5					
	25		19	16	3.5	13	626ZZ×1	6	6					
	30	19	17	3.5	13	698ZZ×1	8							
	15	16	11	9	—	18	685ZZ×2	5	5					
	20		16	13	—	18	625ZZ×2							
	25		19	16	—	18	626ZZ×2	6	6					
	30		19	17	—	18	698ZZ×2	8						
	35		26	23	—	18	6000ZZ×2		8					
	40		26	23	—	18	6900ZZ×2	10						
	15		21	11	9	—	23	685ZZ×2	5	5				
	20	16		14	—	23	688ZZ×2	8						
	25	19		17	—	23	698ZZ×2	8	6					
	30						698ZZ×2							
	35						26	23		—	23	6000ZZ×2	10	8
	40											6001ZZ×2		
	15	27		11	9	—	29	685ZZ×2	5	5				
	20			16	14	—	29	688ZZ×2	8	6				
	25			19	17	—	29	698ZZ×2	8					
	30							698ZZ×2						
	40		6000ZZ×2					10						
	50		28	25	—	29	6001ZZ×2	12	8					
	15		32	11	9	—	34	685ZZ×2	5	5				
20	16	14		—	34	688ZZ×2	8							
25	19	17		—	34	698ZZ×2	8	6						
30						6000ZZ×2								
40						26	23		—	34	6000ZZ×2	10	8	
50						28	25		—	34	6001ZZ×2	12		

型号		3T	P	dh	ℓ	L	使用轴承						
① 代码	2D						No.	d	B				
圆弧型 CDGC CDGCM CDGCA	20	11	16	16	3	13	625ZZ×1	5	5				
	25		19	19	2.5	13	626ZZ×1	6	6				
	30		19	19	2.5	13	698ZZ×1	8	8				
	15	16	11	11	—	18	685ZZ×2	5	5				
	20		16	16	—	18	625ZZ×2						
	25		19	19	—	18	626ZZ×2	6	6				
	30		19	19	—	18	698ZZ×2						
	35		22	17	—	18	6900ZZ×2	10	6				
	40		22	17	—	18	6900ZZ×2						
	15	21	11	9	—	23	685ZZ×2	5	5				
	20		16	14	—	23	688ZZ×2	8					
	25		19	17	—	23	698ZZ×2	8	6				
	30						698ZZ×2						
	35						26	23	—	23	6000ZZ×2	10	8
	40										6000ZZ×2		
	50	28	25	—	23	6001ZZ×2	12	8					
	15	27	11	9	—	29	685ZZ×2	5	5				
	20		16	14	—	29	688ZZ×2	8					
	25		19	17	—	29	698ZZ×2	8	6				
	30						698ZZ×2						
	40						26	23	—	29	6000ZZ×2	10	8
	50						28	25	—	29	6001ZZ×2		
	15	32	11	9	—	34	685ZZ×2	5	5				
	20		16	14	—	34	688ZZ×2	8					
25	19		17	—	34	698ZZ×2	8	6					
30						698ZZ×2							
40						26	23	—	34	6000ZZ×2	10	8	
50						28	25	—	34	6001ZZ×2			



型号(1代码·2D) - (3T) - (FC·KLC·KFC·TC)

可选加工 代码	法兰切割 FC	单侧切割法兰 KLC	单侧无法兰 KFC	变更法兰厚度 TC
技术说明	切割法兰，降低高度。 FC：指定单位0.5mm  ① $D \leq FC < D + 4$ ② 指定方法 FC30.5 ③ 圆弧型不适用	 降低单侧法兰高度。 ④ 圆弧型不适用 ⑤ 不可与追加加工KFC并用	去除图中右侧的法兰。  ⑥ 圆弧型不适用 ⑦ 不可与追加加工KLC并用 ⑧ 指定切割法兰与单侧无法兰时，请同时使用FC与KFC。	将法兰厚度加工为0.5。 L尺寸缩短1mm。  ⑨ 圆弧型不适用

