



手动位移台

交叉滚子滑台




型号(代码·No.)

IAU1025
IAU3055




型号区分: **5** 天发货

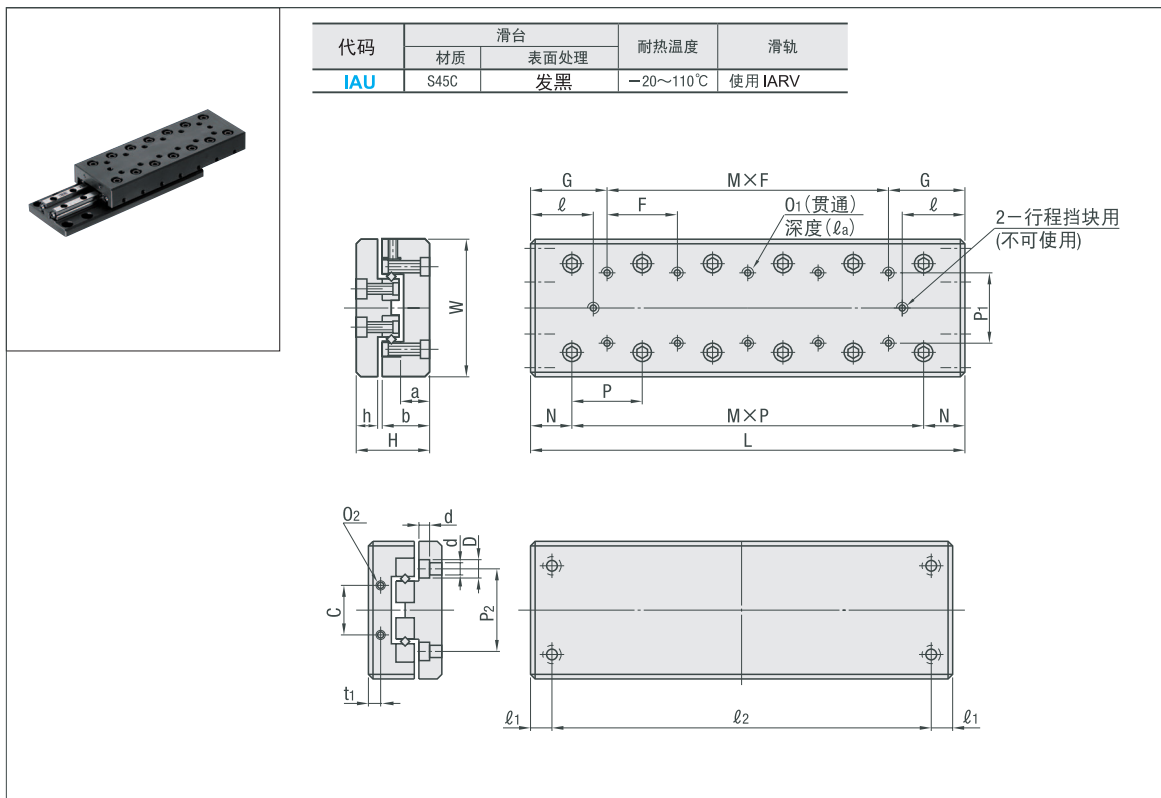

型号		主要尺寸					滑台表面安装孔尺寸					滑台表面尺寸				侧面尺寸						滑轨安装孔尺寸					
代码	No.	行程 (往返)	H	W	L	G	M×F	P ₁	O ₁	ℓ _a	N	P	M×P	ℓ	a	b	h	C	t ₁	O ₂	P ₂	d	D	ℓ ₁	ℓ ₂		
IAU	1025	12	17±0.1	30 ^{-0.2 -0.4}	25	12.5	—	10	M2	4	7.5	10	1×10	2.5	7	11	5.5	12	2.5	M2	22	2.5	4.5	3.5		18	
	1035	18			35		1×10						4.5	28													
	1045	25			45		2×10						6	38													
	2035	18	21±0.1	40 ^{-0.2 -0.4}	35	17.5	—	15	M3	6	10	15	1×15	3	8	14	6.5	16	3.4	M2	30	3.5	6.5	5	25		
	2050	30			50		1×15						4.5	40													
	2065	40			65		2×15						7	55													
	3055	30	28±0.1	60±0.1	55	27.5	—	25	M4	8	15	25	1×25	5.5	10.5	18.5	9	40	5.5	M3	40	4.5	8	10	35		
	3080	45			80		1×25						10.5	60													

No.	容许静力矩			基本额定负载		精度	
	M _A N·m	M _B N·m	M _C N·m	C(动) N	Co(静) N	指示值 A (μm)	指示值 B (μm)
1025	1.79	1.79	3.23	465	478	2	4
1035	4.18	4.18	6.46	807	956		5
1045	5.38	5.38	8.07	962	1195		4
2035	7.04	7.04	10.6	1101	1174		5
2050	11.7	11.74	15.8	1521	1761		4
2065	16.4	16.4	21.1	1908	2348		5
3055	33.8	33.8	56.9	3617	4062	5	5
3080	60.9	60.9	94.8	5409	6770		5

国际单位1N = 0.102kgf

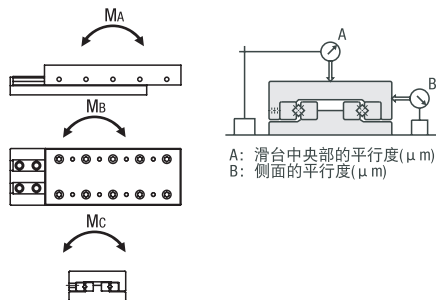

询价④种方式



官网 <http://www.srdfaa.com>
深圳市仕瑞达自动化设备有限公司



全国免费 400-966-3863
客服热线 0755-27926613