

压纹旋钮/小型压纹旋钮 前端圆弧型

把手/手轮/旋钮/拉手 合页/门部件



型号(①代码·②M) — ③L



GARS5 — 15
GARL8 — 50
GARSR4 — 10
GARLR6 — 35

■ 请按步骤①~③选择型号和参数后进行订购。



型号区分: 代码 7 天发货

■ 压纹旋钮

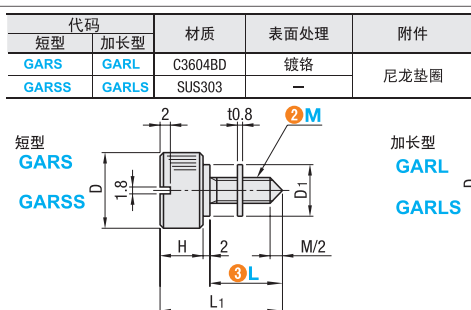

■ 短型

① 代码	② M (粗牙螺纹)	③ L	L1	D	D1	H	重量 (g)
GARS (黄铜)	4	10	20	15	10	8	12
		15	25	15	12	8	13
GARS5 (不锈钢)	5	10	20	15	12	8	14
		15	25	15	12	8	15
	6	10	22	18	12	10	24
		15	27	18	12	10	25

■ 加长型

① 代码	② M (粗牙螺纹)	③ L	L1	L2	D	D1	D2	H	重量 (g)
GARL (黄铜)	4	20	30	12	15	10	3	8	14
		25	35	15	15	12	3.8	8	15
		30	40	15	15	12	3.8	8	16
	5	20	30	12	15	12	3.8	8	17
		25	35	15	15	12	3.8	8	17
		30	40	15	15	12	3.8	8	17
GARLS (不锈钢)	6	40	50	15	18	12	4.5	10	27
		30	42	15	18	12	4.5	10	28
		35	47	15	18	12	4.5	10	28
	8	40	52	15	24	14	6	10	29
		50	62	15	24	14	6	10	50
		50	62	15	24	14	6	10	53




型号 — LC — (FC)
GARLS8 — LC30 — FC20

可选加工	代码	技术说明
	LC	L尺寸最小单位可为1mm。 [指定方法] LC30 M LC 4 10~30 5 10~40 6 10~50 8 20~50 ① NRSS适用于M4~6

可选加工	代码	技术说明
	FC	螺纹部最小单位为1mm。 [指定方法] FC20 M ≤ FC ≤ LC - 2 ① FC仅与LC并用时适用 ② 仅NRSS适用

① LC仅NRSS・NRSL(不锈钢)适用。② FC仅NRSL适用。

■ 小型压纹旋钮 — 前端圆弧型 —

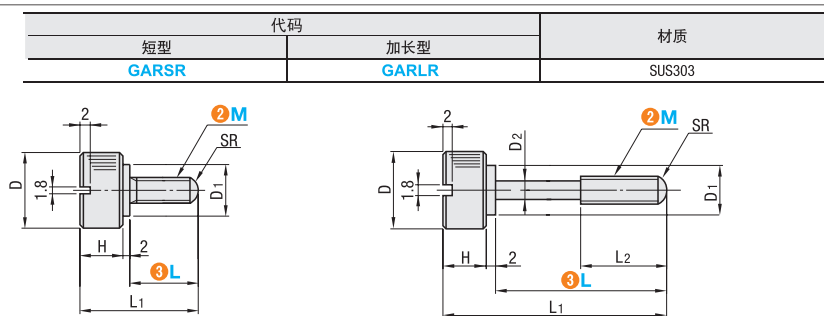

■ 短型

① 代码	② M (粗牙螺纹)	③ L	L1	D	D1	H	SR	重量 (g)
GARSR	4	10	20	15	10	8	4	1 2
		15	25	15	12	8	5	1 4
	5	10	20	15	12	8	5	1 4
		15	25	15	12	8	5	1 4
	6	10	22	18	12	10	6	2 4
		15	27	18	12	10	6	2 5

■ 加长型

① 代码	② M (粗牙螺纹)	③ L	L1	L2	D	D1	D2	H	SR	重量 (g)
GARLR	4	20	30	12	15	10	3	8	4	14
		25	35	15	15	12	3.8	8	5	16
		30	40	15	15	12	3.8	8	5	16
	5	20	30	12	15	12	3.8	8	5	17
		25	35	15	15	12	3.8	8	5	17
		30	40	15	15	12	3.8	8	5	17
	6	40	50	15	18	12	4.5	10	6	27
		30	42	15	18	12	4.5	10	6	28
		35	47	15	18	12	4.5	10	6	28
	8	40	52	15	24	14	6	10	8	29
		50	62	15	24	14	6	10	8	50
		50	62	15	24	14	6	10	8	53



邮箱: Service@srdfaa.com



传真: 0755-8957-5523

SRD仕瑞达