



转轴

止转型 外径公差g6



型号 (1) 代码 · (2) D — (3) L — (4) F — (5) T — (6) W
BCSRV15 — 300 — F15 — T8 — W12

■ 请按步骤 ①~⑥ 选择型号和参数后进行订购。




型号区分: 7 天发货



| 代码 | 相当材质 | 表面处理 |
|--------|--------|-------|
| BCSRV | S45C | 发黑 |
| BCPSRV | | 无电解镀镍 |
| BCSSRV | SUS304 | — |

6.3 / (1.6)

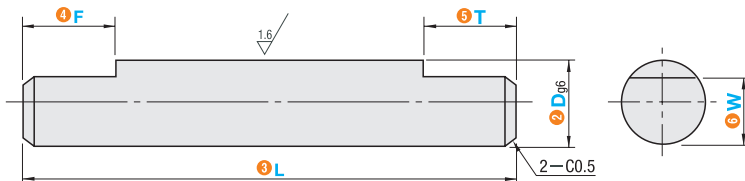

转轴

11

| 型号 | | 最小单位0.1mm | | 最小单位1mm | |
|---------------------------|-------|---|------------|----------|-------|
| ① 代码 | ② Dg6 | ③ L | ④ F · ⑤ T | ⑥ W | |
| BCSRV BCPSRV BCSSRV | 6 | $-\begin{smallmatrix} 0.004 \\ 0.012 \end{smallmatrix}$ | 20.0~300.0 | 2.0~30.0 | 4~5 |
| | 8 | -0.005 | 20.0~400.0 | | 5~7 |
| | 10 | -0.014 | 20.0~500.0 | | 7~9 |
| | 12 | -0.006 -0.017 | 30.0~600.0 | 2.0~54.0 | 9~11 |
| | 13 | | 30.0~600.0 | | 10~12 |
| | 15 | | 30.0~700.0 | | 12~14 |
| | 16 | | 30.0~700.0 | | 13~15 |
| | 17 | | 40.0~800.0 | | 14~16 |
| | 18 | | 40.0~800.0 | | 15~17 |
| | 20 | -0.007 -0.020 | 40.0~800.0 | 2.0~90.0 | 15~18 |
| | 22 | | 50.0~800.0 | | 17~20 |
| | 25 | | 50.0~800.0 | | 20~23 |
| | 30 | | 60.0~800.0 | | 25~28 |

询价④种方式



官网 <http://www.srdfaa.com>
深圳市仕瑞达自动化设备有限公司



全国免费 400-966-3863
客服热线 0755-27926613