



型号(① 代码 · ② D)

DAFJD12

— **3 P** — **4 L** — **5 B**
— P11.97 — L12 — B5.5

■ 请按步骤①~⑤选择型号和参数后进行订购。



型号区分:

代码

7 天发货





代 码		材 质	硬 度
圆 型	多 棱 型		
DAFJA	DAFJD	SKS3	淬火硬度60~63HRC
DACFJA	DACFJD	SUS440C	淬火硬度50~55HRC
DASFJA	—	SUS304	—

$$\frac{6.3}{\nabla} \left(\frac{0.4}{\nabla} \right)^G$$

■ D尺寸公差

D尺寸	m6
2	+0.008
3	+0.002
4	+0.012 +0.004
5	
6	
8	+0.015
10	+0.006
12	+0.018 +0.007
13	
16	
20	+0.021 +0.008

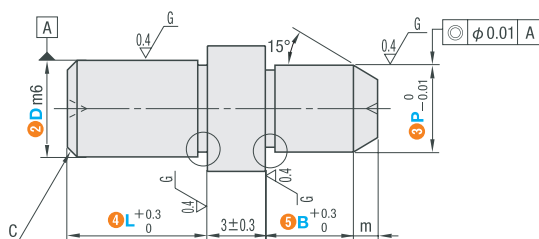

$D(P) \geq 3$ 時	$D(P) < 3$ 時
$a = 1.0$	$a = 0.5$
$d = D(P) - 0.2$	$d = D(P) - 0.1$

型号		^③ P	^④ L	^⑤ B	m	H	(W)	C	
① 代码	②D	最小单位0.01mm	最小单位1mm	最小单位0.1mm					
<圆型> DAFJA DASFJA DACFJA	<多棱型> ①适用于D≥3 DAFJD DACFJD	2	1.50~ 2.00	2~4	2.0~10.0	0.5	6	—	0.5
		3	2.00~ 4.00	3~6	2.0~10.0	1	6	1	0.5
		4	2.00~ 5.00	4~8	2.0~10.0	1	6	1.2	1
		5	3.00~ 6.00	5~10	2.0~15.0 (10.0)	2	8	1.5	1
		6	4.00~ 7.00	5~12	2.0~15.0	2	8	1.8	1
		8	5.00~ 9.00	5~16	2.0~20.0 (15.0)	3	11	2.2	1.5
		10	7.00~12.00	8 (10) ~20	3.0~30.0 (25.0)	3	13	3	2
		12	7.00~12.00	10~24	3.0~30.0 (25.0)	3	15	3.2	2
		13	8.00~13.00	13~26	5.0~30.0 (25.0)	4	16	3.5	2
		16	13.00~16.00	16~32	5.0~30.0	4	19	4	3
20	16.00~20.00	20~40	5.0~30.0	5	23	5.5	3		

①L·B()尺寸适用于多棱型。



传真: 0755-8957-5523

SRD仕瑞达