

# 法兰型直线轴承

嵌入式中型/中间法兰中型

# 直线轴承/滚珠导向组件




型号(1代码·2d)  
ADIRD12

■ 请按步骤①~②选择型号和参数后进行订购。




型号区分:  
代码 5 天发货

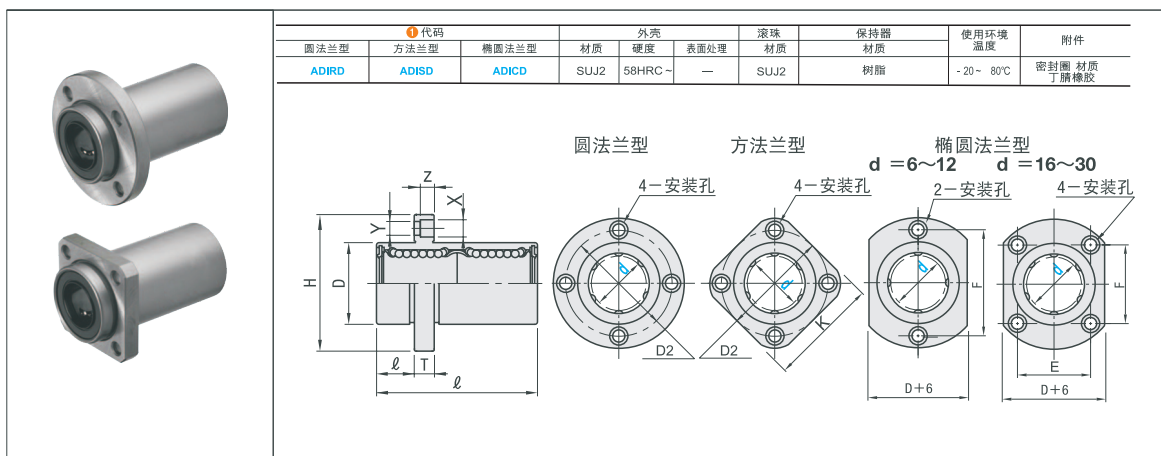

| 型号    |     |        | D      |        | L  |      | ℓ  |    | H   | T   | X   | Y   | Z  | D2 | K  | E    | F     | 偏心   | 滚珠列数  | 垂直度 | 基本额定负载 |       | 静态容许 |      | 重量(g) |  |  |
|-------|-----|--------|--------|--------|----|------|----|----|-----|-----|-----|-----|----|----|----|------|-------|------|-------|-----|--------|-------|------|------|-------|--|--|
| ① 代码  | 2 d | 公差     | 公差     |        | 公差 |      |    |    |     |     |     |     |    |    |    |      |       |      |       |     | C (动)  | N (静) | 圆法兰型 | 方法兰型 | 带圆法兰型 |  |  |
| ADIRD | 6   | 0      | 12     | 0      | 29 | ±0.3 | 5  | 28 | 5   | 3.5 | 6   | 3.1 | 20 | 22 | —  | 20   | 0.015 | 4    | 0.015 | 226 | 310    | 1.42  | 27   | 21   | 24    |  |  |
|       | 8   |        | 15     | —0.013 | 37 |      | 6  | 32 | 6   | 4.5 | 7.5 | 4.1 | 24 | 25 | —  | 24   |       |      |       | 310 | 452    | 2.12  | 47   | 39   | 43    |  |  |
|       | 10  |        | 19     | 0      | 47 |      | 6  | 40 | 6   | 4.5 | 7.5 | 4.1 | 29 | 30 | —  | 29   |       |      |       | 508 | 718    | 4.37  | 85   | 65   | 77    |  |  |
|       | 12  |        | 21     | 0      | 56 |      | 6  | 42 | 6   | 4.5 | 7.5 | 4.1 | 32 | 32 | —  | 32   |       |      |       | 634 | 814    | 6.2   | 89   | 69   | 81    |  |  |
| ADISD | 16  | 28     | —0.016 | 65     | 8  |      | 48 | 8  | 5.5 | 9   | 5.1 | 38  | 37 | 22 | 31 | 1164 | 1448  | 13.1 | 157   | 132 | 149    |       |      |      |       |  |  |
| ADICD | 20  | 0      | 32     | 0      | 65 |      | 8  | 54 | 8   | 5.5 | 9   | 5.1 | 43 | 42 | 24 | 36   | 1554  | 2068 | 18.3  | 232 | 197    | 219   |      |      |       |  |  |
|       | 25  | —0.012 | 40     | —0.019 | 83 |      | 10 | 62 | 10  | 6.6 | 11  | 6.1 | 51 | 50 | 32 | 40   | 1725  | 3068 | 25.3  | 481 | 442    | 452   |      |      |       |  |  |
|       | 30  |        | 45     | 0      | 90 |      | 10 | 74 | 10  | 6.6 | 11  | 6.1 | 60 | 58 | 35 | 49   | 2440  | 3974 | 42.7  | 560 | 482    | 494   |      |      |       |  |  |

① 国际单位1N=0.102kgf

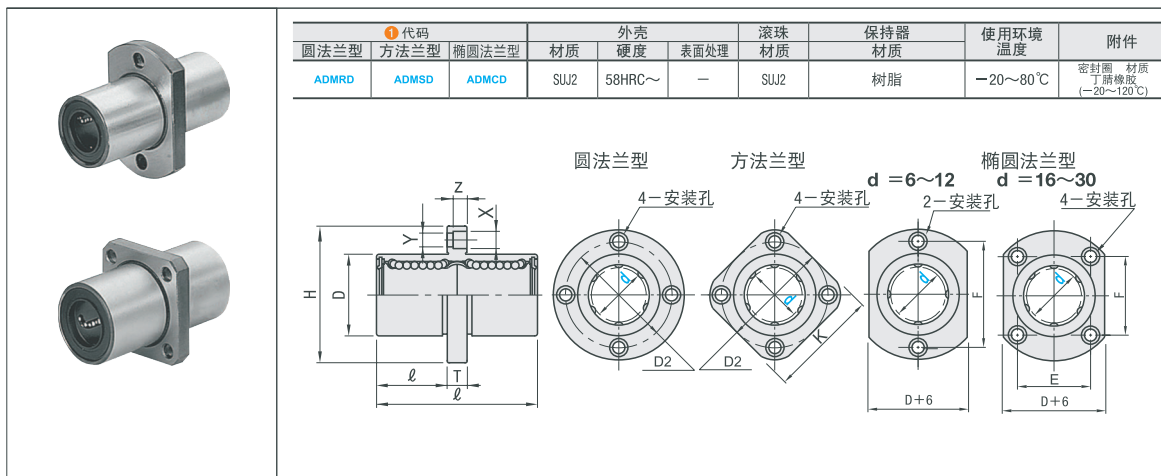

| 型号                       |     |        | D  |        | L  |      | ℓ  |    | H | T  | X   | Y   | Z   | D2  | K  | E   | F    | 偏心    | 滚珠列数 | 垂直度   | 基本额定负载 |       | 静态容许 |      | 重量(g) |       |     |
|--------------------------|-----|--------|----|--------|----|------|----|----|---|----|-----|-----|-----|-----|----|-----|------|-------|------|-------|--------|-------|------|------|-------|-------|-----|
| ① 代码                     | 2 d | 公差     | 公差 |        | 公差 |      |    |    |   |    |     |     |     |     |    |     |      |       |      |       | C(动)N  | K(静)N | 允差N  | 圆法兰型 | 方法兰型  | 椭圆法兰型 |     |
| ADMIRD<br>ADMSD<br>ADMCD | 6   | 0      | 12 | 0      | 29 | ±0.3 | 12 | 28 | 6 | 5  | 3.5 | 6   | 3.1 | 20  | 22 | —   | 20   | 0.015 | 4    | 0.015 | 226    | 310   | 1.42 | 27   | 21    | 24    |     |
|                          | 8   | -0.010 | 15 | -0.013 | 37 |      | 16 | 32 |   | 4  | 6   | 4.5 | 7.5 | 4.1 | 24 | 25  | —    |       |      |       | 24     | 310   | 452  | 2.12 | 47    | 39    | 43  |
|                          | 10  |        | 19 | 0      | 47 |      | 20 | 29 |   |    |     |     |     |     | 30 | —   | 29   |       |      |       | 508    | 718   | 4.37 | 85   | 65    | 77    |     |
|                          | 12  |        | 21 | 0      | 56 |      | 22 | 32 |   |    |     |     |     |     | —  | 32  | 634  |       |      |       | 814    | 6.2   | 89   | 69   | 81    |       |     |
|                          | 16  |        | 28 | -0.016 | 65 |      | 25 | 48 |   |    |     |     |     |     | —  | —   | 1164 |       | 1448 |       | 13.1   | 157   | 132  | 149  |       |       |     |
|                          | 20  | 0      | 32 | 0      | 83 |      | 28 | 54 |   | 8  | 5.5 | 9   | 5.1 | 43  | 42 | 24  | 36   |       | 1554 |       | 2068   | 18.3  | 232  | 197  | 219   |       |     |
|                          | 25  | -0.012 | 40 | -0.019 | 90 |      | 37 | 62 |   | 10 | 6.6 | 11  | 6.1 | 51  | 50 | 32  | 40   |       | 1725 |       | 3068   | 25.3  | 481  | 442  | 452   |       |     |
|                          | 30  |        | 45 | 93     | 40 |      | 74 | 10 |   |    |     |     |     | 6.6 | 11 | 6.1 | 60   |       | 58   |       | 35     | 49    | 2440 | 3974 | 42.7  | 560   | 482 |

① 国际单位1N=0.102kgf

滚珠直线  
导向组件

04



邮箱: Service@srdfaa.com



传真: 0755-8957-5523

SRD仕瑞达