



型号(①代码·②C) — ④弯曲半径 — ⑤链数 — ⑥接头

AHE25

C38

R75

N20

AHJ25A

C38

■ 请按步骤①~⑥选择型号和参数后进行订购。



型号区分:


代码

5 天发货



拖链

代码	开口方向	横梁	材质	颜色	允许温度	阻燃等级	附件
AHE25	内外径开口	桥式	工程塑料	黑色	-20℃ ~ 80℃	UL94-V0	接头
AHEF25		封闭式					

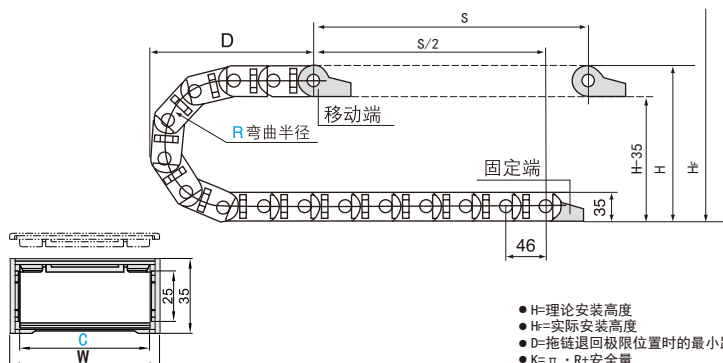


型号		弯曲 半径R	链节 数N	接头C	安装尺寸			所需安装 高度H ₀	外宽 W	节距 P	最大电 缆直径	最大架空 负载 (kg/m)	最大架空 长度 (m)	最大允许 行程 (m)	最大允许 垂直悬挂(m)	重量	
代码	内宽C				H	D	K									AHE25	AHEF25
AHE25 AHEF25	25	55	1~	AHJ25B-C25	145	125	276	175	38	46	22	1.0	1.3	70	30	≈0.67	≈0.69
		75			185	150	346	215									
		100			235	170	414	265									
		125			285	195	496	315									
		150			335	220	578	365									
		175			385	245	660	415									
		200			435	270	742	465									
		55			145	125	276	175									
	38	75		185	150	346	215	51									
		100		235	170	414	265										
		125		285	195	496	315										
		150		335	220	578	365										
		175		385	245	660	415										
		200		435	270	742	465										
		55		145	125	276	175										
		57		75	185	150	346		215							71	
	100			235	170	414	265										
	125			285	195	496	315										
	150			335	220	578	365										
	175			385	245	660	415										
	200			435	270	742	465										
	55			145	125	276	175										
	77			75	185	150	346	215	91								
		100		235	170	414	265										
125		285	195	496	315												
150		335	220	578	365												
175		385	245	660	415												
200		435	270	742	465												


接头

代码	材质	颜色	允许温度	阻燃等级
AHJ25A	工程塑料	黑色	-20℃ ~ 80℃	UL94-V0
AHJ25B				

(斜角型)
AHJ25A



(方型)
AHJ25B



型号		A	B	B ₁	B ₂	C	d	d ₁	d ₂	d ₃
代码	内宽C									
AHJ25B	25	13.5	39	38.7	49.8	11.7	6.6	10.2	11.2	13.7
AHJ25A	28	25.9	53.7	53.2	62.8	11.7	6.2			17.7
AHJ25A	57	44.3	72.7	71.5	81.8	11.5	6.2			15.3
AHJ25B	77	57	91.4	90.5	101.8	11.8	6.2			15.8



邮箱: Service@srdfaa.com



传真: 0755-8957-5523

SRD仕瑞达