



# 定位销/夹具衬套

## 定位销 大头圆锥型

内螺纹型·P尺寸固定型

定位销  
夹具衬套

20



型号(1代码·2No.) — 3P  
DAJRBTB — 8

■请按步骤①~④选择型号和参数后进行订购。



型号区分: 7天发货  
代码





■D尺寸公差

No.	D	g6
6·6T	6	-0.004 -0.012
8·8T	8	-0.005 -0.014
12	12	-0.006 -0.017
13	13	-0.007 -0.020
16	16	-0.007 -0.020
20	20	-0.007 -0.020


■内螺纹底孔表

螺纹直径	M2.6	M3	M4	M5	M8
底孔直径d2	2.3	2.6	3.4	4.3	6.9
底孔深度U	8.5	9.5	12	14.5	21

代码	材质	表面处理	硬度
DAJRBTB	SKS3	-	淬火硬度60~63HRC
DAGJRTB	SKS3	镀硬铬 厚度3μm以上	淬火硬度50~55HRC 镀层硬度750HV~
DACJRTB	SUS440C	-	淬火硬度50~55HRC
DASJRTB	SUS304	-	-

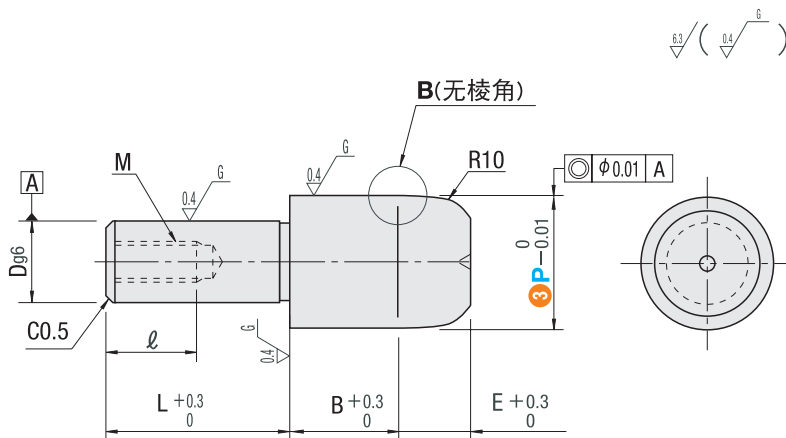

①B放大图



型号		③P选择	L	B	E	D	M (粗牙螺纹)	ℓ
①代码	②No.							
DAJRBTB DAGJRTB DACJRTB DASJRTB	6	8 10	10	8	5	6	M3	5
	6T	8 10	10	8	5	6	M2.6	4
	8	10 12 13	15	8	5	8	M5	8
	8T	10 12 13	15	8	5	8	M4	6
	10	12 13 15	15	10	5	10	M5	8
	12	13 15 16	15	10	6	12	M5	8
	13	15 16	22	10	6	13	M8	12
	16	20 25	22	10	7	16	M8	12
	20	25 30	30	15	7	20	M8	12

