




型号

BA6901VV

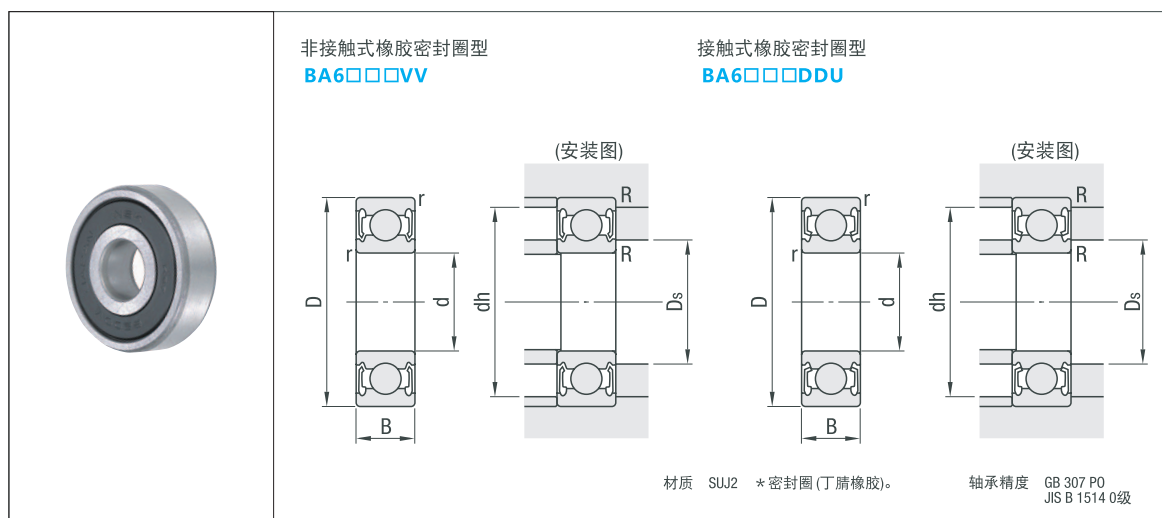

型号区分:

代码

5 天发货

型号		d	D	B	r (min.)	基本额定负载		容许转速 rpm (参考)	安装尺寸				重量 (g) (参考)		
非接触式 橡胶密封圈型	接触式 橡胶密封圈型					Cr (动) kN Cor (静) kN			Ds		dh (max.)	R (max.)			
									(min.)	(max.)					
BA6800VV	BA6800DDU	10	19	5	0.3	1.72	0.84	24000	12	12	17	0.3	5		
BA6900VV	BA6900DDU		22	6		2.7	1.27			22000	12.5		20	9	
BA6000VV	BA6000DDU		26	8		4.55	1.96			22000	12.5		24	18	
BA6200VV	BA6200DDU	12	30	9	0.6	5.1	2.39	18000	14	16	26	0.6	32		
BA6801VV	BA6801DDU		21	5	1.92	1.04	20000			14	19	6			
BA6901VV	BA6901DDU		24	6	2.89	1.46	20000			14.5	22	10			
BA6001VV	BA6001DDU	15	28	8	0.3	5.1	2.37	18000	16	15.5	26	0.3	22		
BA6201VV	BA6201DDU		32	10		6.1	2.75			17000	17		28	37	
BA6301VV	BA6301DDU		37	12		9.7	4.2			16000	18		32	1	60
BA6802VV	—	17	24	5	0.3	2.07	1.26	17000	17	17	22	0.3	7		
BA6902VV	BA6902DDU		28	7		3.65	2			17	26		15		
BA6002VV	BA6002DDU		32	9		5.6	2.83			15000	19		30	31	
BA6202VV	BA6202DDU	19	35	11	0.6	7.65	3.6	14000	19	20.5	31	0.6	45		
BA6903VV	BA6903DDU		30	7	0.3	4.6	2.55			15000	19.5	28	0.3	19	
BA6003VV	BA6003DDU		35	10		6	3.25			13000	21.5	33		41	
BA6203VV	BA6203DDU	21	40	12	0.6	9.55	4.6	12000	21	23.5	36	0.6	67		
BA6303VV	—		47	14	1	13.6	6.65			11000	25.5	42	1	113	
BA6904VV	BA6904DDU		37	9	0.3	6.4	3.7			12000	22	24	35	0.3	37
BA6004VV	BA6004DDU	20	42	12	0.6	9.4	5	11000	24	25.5	38	0.6	68		
BA6204VV	BA6204DDU		47	14	1	12.8	6.6			25	26.5	42	1	107	
—	BA6304DDU		52	15	1.1	15.9	7.9			26.5	28	45.5		145	
BA6905VV	BA6905DDU	25	42	9	0.3	7.05	4.55	9500	27	28.5	40	0.3	42		
BA6005VV	BA6005DDU		47	12	0.6	10.1	5.85			29	30	43	0.6	79	
BA6806VV	—		42	7	0.3	4.7	3.65			9000	32	32	40	0.3	24
BA6006VV	BA6006DDU	30	55	13	1	13.2	8.3	8000	35	36.5	50	1	116		
BA6207VV	BA6207DDU		72	17	1.1	25.7	15.3			6300	41.5		44.5	65.5	284

