



支柱/支柱固定夹底座

设备安装用底座

方法兰/腰形孔型



型号(1)代码·(2)D)
HDABY20

■请按步骤①~②选择型号和参数后进行订购。



型号区分:
代码 7 天发货


■ 支架单品



■ 支架单品



代码		材质	表面处理	附件
横向调整	纵向调整			
HDABX	HDABY	S45C	发黑	止动螺丝
HDAMX	HDAMY		无电镀镍	

(横向调整)

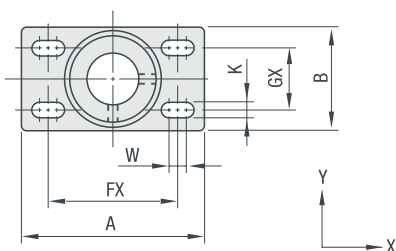

√ (13/ 19/ 25/ 31)

(纵向调整)



型号			A	B	FX	FY	GX	GY	K	W	D ₁	(D ₃)	H	T	ℓ	M	(d)	
代码	DH7																	
横向调整 HDABX	10	+ ^{0.015} ₀	56	30	40	40	14	14	4.5	5	26	28	35	11	18	M4	6.0	
	12	+0.018 0	62	36	44	44	18	18	5.5		28	30	35		20	M5	10.0	
	15		70	40	50	50	20	20	6.6	6	31	33	40					
(D10・25・35无) HDAMX	20	+0.021 0	80	50	56	60	35	25	6.6	10	40	43	45	11	25	M5	11.7	
	25		100	60	70	75	36	30	9		10	45	52		50	30	M6	15.2
	30		106		75	80						50	56		60			16.0
纵向调整 HDABY	35	+0.025 0	118	80	80	90	50	40	11	15		55	60	70	14			40
	40		125		88	95					60	66	80	22.7				
	(D10・15无) HDAMY		50		140	100	95	106	70		50	14	20	70		77	100	

支柱固定夹底座

27

询价④种方式



官网 <http://www.srdfaa.com>
深圳市仕瑞达自动化设备有限公司



全国免费 400-966-3863
客服热线 0755-27926613