



直线导轨

微型直线导轨 滑块加长型



型号(①代码·②H) — ③L
AGLMP10 — 275



■ 请按步骤①~③选择型号和参数后进行订购。



型号区分: 7 天发货



耐热温度: -20~80℃

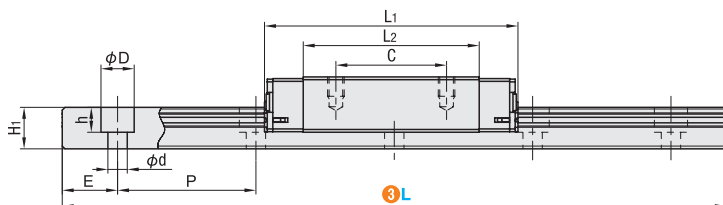

材质 硬度	代码		滑块 数量
	微预压型 精密级	普通间隙型 普通级	
不锈钢 56HRC~	AGLMP	AGLMC	1
	AGLM2P	AGLM2C	2


型号		滑块尺寸										导轨尺寸			
① 代码	② H	③ L	W	L1	B	C	S×l	L2	K	W1	W2	H1	沉孔 d×D×h	P	E
(单滑块)	8	30~130	17	31	12	12	M2×2.5	21.6	1.5	7	5	5	2.4×4.2×2.3	15	最小单位1mm。 (E尺寸为两端均分)
(双滑块)	10	65~275	20	40.5	15	15	M3×3	30.9	2.2	9	5.5	6	3.5×6×3.5	20	
AGLMP	13	70~470	27	44	20	20	M3×3.5	32	2.7	12	7.5	8	3.5×6×4.5	25	
AGLMC	16	110~670	32	57	25	25	M3×4	42.8	3.1	15	8.5	10	3.5×6×4.5	40	
	20	160~700	40	67.7	30	30	M4×6	52.3	10	20	10	11	6×9.5×5.5	60	

国际单位1N=0.102kgf


■ 预压与精度基准

单位: μm

H	基本额定负载		静态容许力矩			重量	
	C(动) kN	Co(静) kN	MA N·m	MB N·m	Mc N·m	滑块 kg	导轨 kg/m
6	0.58	0.98	1.7	1.7	2.2	0.005	0.13
8	1.5	2.3	7.4	7.4	9	0.016	0.19
10	2.1	3.6	12	12	12	0.03	0.31
13	3.2	5.2	24	26	32	0.06	0.61
16	5.6	8.6	57.2	61	67.5	0.10	1.02
20	7.1	12.9	86	80.2	135	0.18	1.65



规格	微预压型 精密级	普通间隙型 普通级
高度H的尺寸公差	±20	±40
宽度W2的尺寸公差	±25	±40
成对高度H公差	±15	±30
成对高度W2公差	±20	±30

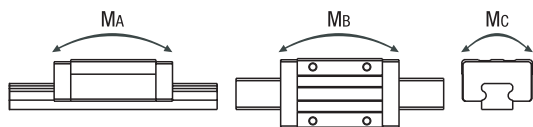

询价④种方式



官网 <http://www.srdfaa.com>
深圳市仕瑞达自动化设备有限公司



全国免费 400-966-3863
客服热线 0755-27926613