




型号(①代码·②D·③导程) — ④L
AJSSR812
AJSSRN812

■请按步骤①~④选择型号和参数后进行订购。




型号区分: 7天发货
代码

■微型滑动丝杠/螺帽



代码	材质	
	轴	螺帽
AJSSR	右螺纹	SUS304
AJSSRN		特殊树脂

① AJSSR为轴与螺帽配套、
AJSSRN为仅有螺帽，且也可用于
AJSSRA、AJSSRW。

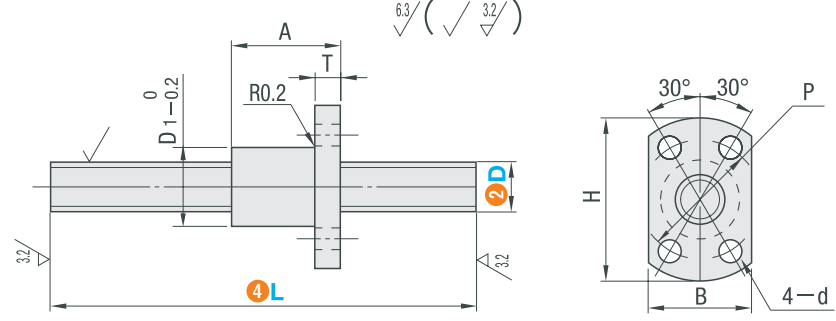

相
梯
关
形
零
件
丝
杠
10

① 代码	型号		④ L 最小单位1mm	头数	树脂螺帽尺寸							容许轴向负载 N(参考)	容许旋转 速度 rpm(参考)	紧固扭矩 N·mm	重量 (参考) g/100mm
	② D	③ 导程			D1	H	A	T	B	P	d				
AJSSR AJSSRN (仅螺帽)	4	01	30~150	1	10	23	11.5	3.5	15	15	2.9	50	2500	180	11(3)
		02		60								11(3)			
	6	01	30~250	1	12	26	14.5	3.5	17	18	3.4	120	2000	400	23(3)
		02		60								25(3)			
		09		90								25(3)			
		18		110								25(3)			
	8	01	40~250	1	14	29	18	4	18	21	3.4	200	2000	400	42(5)
		02		290								38(5)			
		12	210	40(5)											
		24	210	41(4)											
	10	02	50~250	1	16	33	22	5	21	24	4.5	460	1500	500	59(6)
		15	410	58(6)											
		30	440	56(6)											
	12	02	50~250	1	18	35	25	5	22	26	4.5	660	1000	500	86(8)
		18		750								86(8)			
		36	50~550	6								660			86(8)
			50~550	6								540			87(7)



邮箱: Service@srdfaa.com



传真: 0755-8957-5523

SRD 仕瑞达