



支柱/支柱固定夹底座

底座用支架

标准型




型号(①代码·②D)
HDABY20

■请按步骤①~②选择型号和参数后进行订购。



型号区分:
代码 7 天发货

■标准型

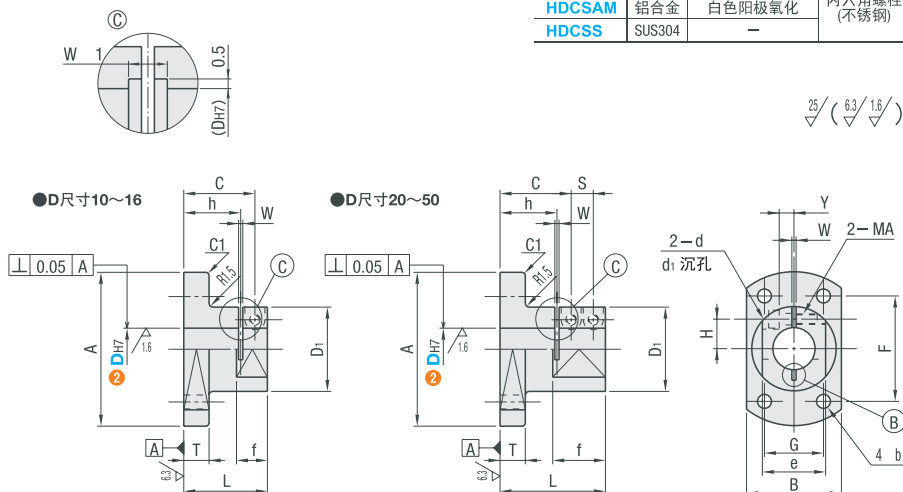

型号		DH7		A	B	L	T	D1	F	G	b	C	S	h	f	H	Y	W	d	d1	MA	e	附属螺栓
HDCSB HDCSM HDCSAM HDCSS	代码																						
	10		+0.015 0	50	33	35	10	30	35	18	4.5	29	—	22	15	10	5	2	4.5	8	M4	20	M4 -15° 1个
	12		+0.018 0	52	35	35	10	32	37	20	4.5	29	—	22	15	11	6	2	4.5	8	M4	22	M4 -15° 1个
	15		+0.018 0	58	40	39	12	35	40	24	5.5	32	—	24	17	12.5	6	2	5.5	10	M5	25	M5 -20° 2个
	16		+0.018 0	58	40	39	12	35	40	24	5.5	32	—	24	17	12.5	6	2	5.5	10	M5	25	M5 -20° 2个
	20		+0.021 0	73	45	50	12	40	50	28	6.6	33.8	10.5	27	25	14	7	2	5.5	9.5	M5	30	M5 -20° 2个
	25		+0.021 0	93	55	60	12	50	62	36	9	41.5	12	34	28	18	10	2	6.6	11	M6	35	M6 -25° 2个
	30		+0.021 0	103	65	70	15	60	72	42	9	47	15	38	34	21	10	2	9	14	M8	45	M8 -25° 2个
	35		+0.025 0	108	70	80	15	65	75	45	11	55	16	44	39	24	10	3	9	14	M8	50	M8 -25° 2个
	40		+0.025 0	118	75	90	15	70	78	55	11	64	17	53	40	26	13	3	9	14	M8	60	M8 -30° 2个
	50		+0.025 0	138	90	110	18	85	95	60	14	77.5	21	65	48	32	16	3	11	17.5	M10	70	M10 -35° 2个

① DH7公差、垂直度为开口加工前的公差。

