





轴承、轴承座组件

带座轴承 底部安装双轴承型



代码	材质		表面处理	附件
	高度h选择型	轴承	固定座	挡圈
BBBWB	钢	S45C	发黑	弹簧钢
BBBW			无电解镀锌	SUS304
BBBWA		铝合金	本色阳极氧化处理	
BBBWSA	不锈钢			

6.3/(1.6/)

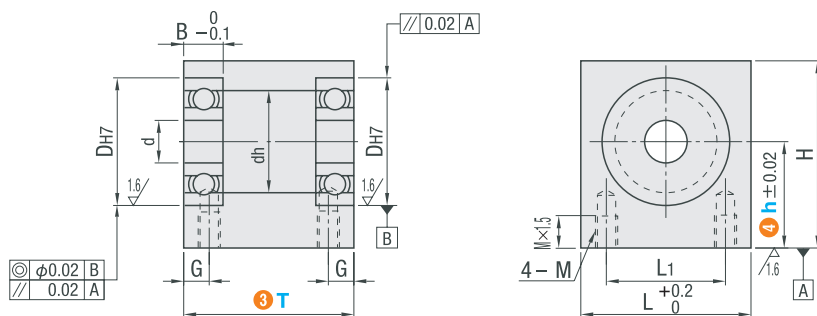

型号(1代码·2轴承型号)

BBBW6000ZZ

3T - 4h

25 - 30

■ 请按步骤①~④选择型号和参数后进行订购。



型号区分:

代码

7天发货

型号		宽度	高度	d	DH7		dh	B	H	L	L1	G	M (粗牙螺纹)
❶ 代码	❷ 轴承型号	❸ T	❹ h		公差								
BBBWB BBBW BBBWA BBBWSA	* 623ZZ	20 30	15 20 25	3	10	+0.015 0	7	4	h+9	20	10	5	M4
	* 624ZZ	20 30	15 20 25	4	13	+0.018 0	9	5	h+11	22	14		
	* 605ZZ	20 30	15 20 25	5	14		10	5	h+11	24	16		
	* 625ZZ	25 30	20 25 30	5	16		12	5	h+12	28	16		
	606ZZ	25 35	20 25 30	6	17	+0.021 0	13	6	h+13	34	22	6	M5
	626ZZ	25 35	20 25 30	6	19		15	6	h+14	36	24		
	608ZZ	25 35	20 25 30	8	22		18	7	h+15	38	26		
	628ZZ	25 35	25 30	8	24		20	8	h+16	34	22		
	6900ZZ	25 40	25 30 40	10	22		19	6	h+15	32	20		
	6000ZZ	25 40	25 30 40	10	26		22	8	h+17	38	26		
	6200ZZ	30 40	25 30 40	10	30		24	9	h+19	40	28		
	6901ZZ	25 40	25 30 40	12	24		21	6	h+16	36	24		
	6001ZZ	25 40	25 30 40	12	28		24	8	h+18	40	28		
	6201ZZ	30 40	25 30 40	12	32	+0.025 0	26	10	h+20	42	30	7	M6
	6902ZZ	25 50	30 40 50	15	28	+0.021 0	25	7	h+18	42	30		
	6002ZZ	30 50	30 40 50	15	32	28	9	h+20	50	36			
	6202ZZ	35 50	30 40 50	15	35	29	11	h+22	44	30			
	6903ZZ	25 50	30 40 50	17	30	27	7	h+19	42	30			
	6003ZZ	30 50	30 40 50	17	35	31	10	h+22	50	36			
	6203ZZ	35 50	30 40 50	17	40	34	12	h+24	48	36			
	6904ZZ	35 50	40 50 60	20	37	34	9	h+23	45	31			
	6004ZZ	40 50	40 50 60	20	42	+0.025 0	36	12	h+25	54	38	8	M8
	6204ZZ	45 50	40 50 60	20	47		40	14	h+28	60	44		
	6005ZZ	40 60	40 50 60	25	47		41	12	h+28	62	46		
	6205ZZ	45 60	50 80	25	52		45	15	h+31	70	50		
	6006ZZ	40 60	50 80	30	55	+0.030 0	48	13	h+32	74	54	10	M10
	6206ZZ	50 60	50 80	30	62		55	16	h+36	82	62		



型号(1代码·2轴承型号)

BBBK6000ZZ

3T - 4h

25 - 30

(KCC·NA)

NA

可选加工

代码

不装配轴承·

挡圈

NA

加工倒角C2

KCC

技术说明

不将轴承、挡圈装入固定座中，
而以附件形式发货。

加工上端面倒角C2

询价④种方式



官网 <http://www.srdfaa.com>
深圳市仕瑞达自动化设备有限公司



全国免费 400-966-3863
客服热线 0755-27926613